苏州洋邦机械设备有限公司

Suzhou YangBang Machinery Co., Ltd

江苏省苏州市太仓市沙溪镇大木桥路401号

No.401, Damuqiao Road, Shaxi Town, Taicang City, Suzhou City, Jiangsu Province

手机Whatsapp: +8613916189180

邮箱 Email: elma@yangbangmachine.com

网址 Website: yangbang.com

应用于制药、医疗、化工、保健品、食品、化妆品等行业；

针对客户需求，非标定制瓶装液体、粉剂生产线设备。

Used in pharmaceutical, medical, chemical, health care products, food, cosmetics and other industries;

Customize bottle liquid and powder production lines equipments according to customers' need.

YANG 洋 BANG 邦 ®

精益求精 匠心智造

Striving for Excellence, Crafting with Mind

专业提供生物医药、日化、食品等灌装包装整体解决方案

Professional to provide overall solution of filling and packaging technology for biomedicine, daily chemical, food,etc

乾坤汇集定家邦

沧海横流聚五洋



生物医药 Biomedicine



日化 Daily chemical



食品保健品 Food health product

创新 • 共赢

梦想起航 / 共创辉煌

BRIEF INTRODUCTION

企业简介

公司成立于2009年，占地面积达20余亩，拥有现代化厂房近20000平方米，员工数量100余人，公司建立了灌装和包装成套设备工程技术研究中心，拥有超过20人的研发工程师团队。

产品广泛应用于滴眼液、口服液、妇科凝胶、IVD体外诊断试剂、注射液、消毒液、冻干粉、胶囊、药片、保健品、蛋白粉、水、果汁、功能饮料、蜂蜜、食品酱、酸奶、电子烟油、精油、香水、蚊香液、指甲油、睫毛膏、眼线液、唇彩、口红、面霜、洗发水、沐浴乳、洗洁精、兽药、农药等多种产品的灌装生产。

制造标准严格：原材料及成品都经过严格的质量检验与测试。

公司秉承:“顾客至上、科技同步、质优价廉、诚信守约”，积极参与国内和国际市场的竞争，为用户提供简便、稳定、高效、安全的产品和全面满意的服务是洋邦公司全体员工的责任和永远不变的承诺。

我们以饱满的热情、真诚的合作态度，欢迎各界朋友光临。

质优价廉 诚信守约

High quality and affordable,Integrity and compliance

100+
There are currently over 100 employees
现有员工100多人

30+
More than 30 patent certificates
专利证书30多个

2000+
Annual production capacity of more than 2000 sets
年生产能力2000多台





2009年
公司始创于2009年
The company was founded in 2009

经营理念 PHILOSOPHY

使命：专业技术服务于生物医药、食品、日化等行业　愿景：智慧药厂、食品厂、日化厂的交付者　价值观：天道酬勤

Mission: Professional and technical services in biomedicine, food, daily chemical and other industries
Vision: The deliverer of smart pharmaceutical factory, food factory and daily chemical factory
Values: God rewards the diligent

The company was founded in 2009, covers an area of more than 20 acres, has a modern workshop of nearly 20,000 square meters, the number of employees is more then 100, the company established the filling and packaging complete equipment engineering technology research center, with more than 20 R & D engineers team.

Products are widely used in eye drops, oral liquid, gynecological gel, IVD diagnostic reagents in vitro, injection, disinfectant, freeze-dried powder, capsules, tablets, health products, protein powder, water, juice, functional drinks, , wine,honey, food sauce, yogurt, e-cigarette oil, essential oil, perfume, mosquito repellent liquid, nail polish, mascara, liquid eyeliner, lip gloss, lipstick, face cream, shampoo, body wash, dish soap, veterinary medicine, pesticides and other products filling production.

Strict manufacturing standards: raw materials and finished products are subject to strict quality inspection and testing.

Company adhering to: "customer first, science and technology synchronization, high quality and low price, good faith and keeping promises", actively participate in the domestic and international market competition, to provide users with simple, stable, efficient, safe products and comprehensive and satisfactory service is the responsibility of all employees of Yangbang company and will never change the commitment.

We are full of enthusiasm, sincere cooperation attitude, welcome friends from all walks of life to visit.


OFFICE AND TEAM 办公与团队

科学优化的组织机构是洋邦机械运作的良好基础。在长期的磨合与实践过程中，洋邦铸就了一支优秀的经营管理团队。通过对人才的积极引进与培训，在人力资源优化方面获得了显著提升，企业内部管理体制全部完善，部门之间的服务关系和职责分工明确，决策更加灵活，内部信息畅通无阻。

Scientific and optimized organization is a good basis for the operation of Yangbang Machinery. In the long-term running-in and practice process, Yangbang cast an excellent management team. Through the active introduction and training of talents, the enterprise has been significantly improved in the optimization of human resources, the internal management system is complete, the service relationship between departments and the division of responsibilities is clear, the decision-making is more flexible, and the internal information is unimpeded.





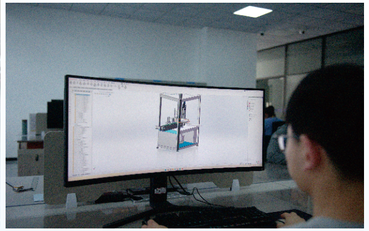



PRODUCTION AND EQUIPMENT 生产与装备


治之已精，精益求精；装备先行，科技创新

Striving for perfection, Keeping improving;
Well prepared equipment, Innovative science and technoligy.

采用高精度加工工艺，全面推行计算机辅助加工，确保机加工质量。
应用技术直接进行对话编程，对钻、削、铣、磨等关键部位实施数控机械加工，确保极限精度。

Adopting high-precision machining technology, fully implement computer-aided machining to ensure the quality of machining.
Application of technology of direct dialogue on programming, drilling, cutting, milling, grinding and other key parts of the implementation of CNC machining, ensure ultimate accuracy.









WORK SHOP











CERTIFICATE OF HONOR荣誉证书



创新是企业生存和发展的原动力

Innovation Is The Source Of Enterprise Survival And Development

技术理念 TECHNICAL CONCEPT

- 通过系统及工程集成创新，我们致力于为行业带来新价值。
- 提高生产效率，降低生产成本，收集生产数据，方便验证和管理。
- 建立多层次的技术人才梯队，不断地学习与实践，培养出更多的行业专家。
- 坚持学习与分享，与业内同仁共同分享“技术和实践”，与我们的客户一起学习与成长。
- 专注于研究药物制造科学、药机制造科学、食品及日化设备的制造科学。

- We are committed to bringing new value to the industry through integrated innovation in systems and engineering.
- Improve production efficiency, reduce production costs, collect production data, and facilitate verification and management.
- Establish a multi-level technical talent echelon, continue to learn and practice, and train more industry experts.
- Insist on learning and sharing, share "technology and practice" with colleagues in the industry, and learn and grow together with our customers.
- Focus on the research of pharmaceutical manufacturing science, pharmaceutical machinery manufacturing science, food and daily chemical equipment manufacturing science.

公司自成立以来，一直注重产品研发和技术进步，先后研发新产品上百项，其中已获得国家专利几十项，明显的技术优势为洋邦在行业中奠定了坚实的地位。一直以来，洋邦人把社会责任当作义务来履行。通过研发以及在科技和自主知识产权创新，洋邦将低碳环保、可持续发展与节约能源理念融入产品和工程项目，为生物医药、食品、日化事业做贡献。

Since its establishment, the company has been focusing on product research and development and technological progress, and has developed hundreds of new products, including dozens of national patents, the obvious technological advantages have laid a solid foundation for Yangbang in the industry. All along, Yangbang people take social responsibility as an obligation to fulfill. Through research and development and innovation in science and technology and independent intellectual property rights, Yangbang integrates the concept of low-carbon environmental protection, sustainable development and energy conservation into products and engineering projects, and contributes to the cause of biomedicine, food and daily chemical.



APPLICABLE INDUSTRY DIRECTORY 适用企业名录

由于篇幅有限，排序不分先后，未能一一列举！
Due to the limited space, the sorting isn't in particular order and cannot be listed one by one!



CONTENTS 目 录

01 YB-XP300+HX6+K16A
全自动口服液灌装生产线
Automatic Oral Liquid Filling Production Line 01

02 YB-XP300+HX6+K16B
全自动口服液灌装生产线
Automatic Oral Liquid Filling Production Line 02

03 YB-JX80+HX6+F2
低速西林瓶粉剂联动生产线
Low Speed Vial Bottle Powder Linkage Production Line 03

04 YB-XP300+HX6+Y10
高速西林瓶液体联动生产线
High Speed Vial Bottle Liquid Linkage Production Line 04

05 YB-LP300+SL8/16+T160+CG120+LF70+LT80
全自动数粒灌装生产线
Automatic Counting Filling Production Line 05/06

06 YB-GP800/GP1200
供瓶机
Bottle Feeding Machine 07

07 YB-TP800/TP1200
屯瓶机
Bottle Collecting Machine 08

08 YB-LPA/LPB
全自动理瓶机
Automatic Bottle Unscrambler 09

09 YB-LPC
全自动理瓶机
Automatic Bottle Unscrambler 10

10 YB-LP300
全自动理瓶机
Automatic Bottle Unscrambler 11

11 YB-XP300
全自动洗瓶机
Automatic Bottle Washing Machine 12

12 YB-XP350
圆盘式洗瓶机
Disc Type Bottle Washing Machine 13

13 YB-JX80
全自动绞龙式超声波洗瓶机
Automatic Spiral Type Ultrasonic Bottle Washing Macnine 14

14 YB-ZX100
全自动转鼓式洗瓶机
Automatic Rotary Drum Type Bottle Washing Machine 15

15 YB-LX110/LX220
全自动单/双螺杆洗瓶机
Automatic Single/Double Screw Type Bottle Washing Machine 16

16 YB-FX40
全自动洗瓶机
Automatic Washing Machine 17

17 YB-SM
隧道式水浴(巴氏)灭菌机
Tunnel Type Water Bath (Pasteurization) Sterilization Machine 18

18 YB-PM9000/PM16000/PM22000/PM32000
连续式喷淋灭菌机
Continuous Spray Sterilization Machine 19

19 YB-HX2/HX4/HX6
烘箱
Sterilization Oven 20

20 YB-DRH/SRH
双门(单门)热风循环烘箱
Double Doors (Single Door) Hot Air Circulation Oven 21

21 YB-K4
全自动口服液灌装旋/轧盖机
Automatic Oral Liquid Filling and Capping/Crimping Machine 22

22 YB-K12A/K16A
口服液高速灌封机
High Speed Oral Liquid Filling and Sealing Machine 23

23 YB-K16B
伺服跟踪灌装封口机
Servo Tracking Filling and Sealing Machine 24

24 YB-KS2/KS4
全自动卡式注射剂灌装轧盖机
Automatic Cartridge Injection Filling and Crimping Machine 25

25 YB-X2/X4
西林瓶灌装上塞轧盖机
Vial Filling Plugging and Crimpig Machine 26

26 YB-DJ-1
全自动多功能灯检机(单道)
Automatic Multi-function Inspection Machine (Single Channel) 27/28

27 YB-BDJ-D
冻干粉/水针半自动灯检机 Semi-automatic
Inspection Machine For Frozen Powder Liquid 29/30

28 YB-BDJ-K
口服液半自动灯检机
Semi-automatic Inspection Machine For Oral Liquid 31/32

29 YB-Y2/Y4/Y8/Y10
全自动小瓶液体灌装旋盖机
Automatic Small Bottle Liquid Filling and Capping Machine 33

30 YB-YG4/YG6
全自动液体灌装旋/轧盖机
Automatic Liquid Filling and Capping/Crimping Machine 34

31 YB-YG8/YG10
全自动液体灌装旋/轧盖机
Automatic Liquid Filling and Capping/Crimping Machine 35

32 YB-J4A/J6A/J8A
全自动酱体灌装机
Automatic Sauce Filling Machine 36

33 YB-JGX4/JGX6/JGX8
全自动酱体灌装生产线
Automatic Sauce Filling Production Line 37

34 YB-J4B/J6B/J8B
全自动酱体灌装旋盖机
Automatic Sauce Filling and Capping Machine 38

35 YB-400C/800C/1200C
全自动胶囊充填机
Automatic Capsule Filling Machine 39

36 YB-G2/G4
全自动跟随式液/酱体灌装机
Automatic Follow-up Liquid/Sauce Filling Machine 40

37 YB-DT30
大桶液/酱体灌装压盖机
Big Barrel Liquid/Sauce Filling and Capping Machine 41

38 YB-F1/F2
全自动粉剂灌装旋/轧盖机
Automatic Powder Filling and Capping/Crimping Machine 42

39 YB-JMA 半自动睫毛膏、眼线液、唇彩灌装旋盖机
Semi Automatic Mascara/Eyeliner/Lip Gloss
Filling and Capping Machine 43

40 YB-JMB 全自动睫毛膏、眼线液、唇彩灌装旋盖机
Automatic Mascara/Eyeliner/Lip Gloss
Filling and Capping Machine 44

41 YB-KA/KB
全自动颗粒灌装旋盖机
Automatic Granule Filling and Capping Machine 45

42 YB-XG4
全自动四轮旋盖机
Automatic Four-wheel Capping Machine 46

43 YB-CG120
全自动搓盖机
Automatic Capping Machine 47

44 YB-ZK4/ZK6
全自动真空旋盖机
Automatic Vacuum Capping Machine 48

CONTENTS 目 录

45 YB-FBJ1/FBJ2
全自动转盘式灌装封杯机
Automatic Turntable Type Filling and Sealing Machine 49

46 YB-XGC1/XGC2
全自动小罐茶封口机
Automatic Sealing Machine for Small Can Tea 50

47 YB-FBF1/FBF2
全自动咖啡胶囊填充封口机
Automatic Coffee Capsule Filling and Sealing Machine 51

48 YB-FBJ4/FBJ6/FBJ8
全自动直线式灌装封口机
Automatic Linear Type Filling and Sealing Machine 52

49 YB-FG130B
全自动封罐机
Automatic Can Sealing Machine 53

50 YB-FK2/FK4
广口瓶铝箔封口机
Aluminum Foil Sealing Machine for Wide Mouth Bottle 54

51 YB-LF70
全自动铝箔封口机
Automatic Aluminum Foil Sealing Machine 55

52 YB-QW1/QW2
全自动气雾剂灌装轧盖机
Automatic Aerosol Filling and Crimping Machine 56

53 YB-FW35
全自动灌装封尾机
Automatic Tube Filling and Sealing Machine 57

54 水处理设备
Water Treatment Equipment 58

55 冲洗、灌装、封口三合一机
Washing Filling Capping Machine 3-in-1 59

56 冲洗、热灌装、封口三合一机(PET瓶)
Washing Hot Filling Capping Machine 3-in-1 (PET Bottle) 60

57 冲洗、汽水灌装、封口三合一机(PET瓶)
Washing Carbonated Filling Capping Machine 3-in-1(PET Bottle) 61

58 冲洗、热灌装、封口三合一机(玻璃瓶)
Washing Hot Filling Capping Machine 3-in-1(Glass Bottle) 62

59 不含气果汁、茶饮料、蛋白饮料易拉罐灌装包装生产线
Non-carbonated Can Filling and Packing Production Line For Juice,Tea Beverage,Protein Beverage 63

60 冲洗、汽水灌装、封口三合一机(玻璃瓶)
Washing Carbonated Filling Capping Machine 3-in-1(Glass Bottle) 64

61 HYGZ 系列易拉罐含气饮料灌装封口一体机
HYGZ Series Carbona Soft Drinks Cans Filling and Sealing Machine 65

62 YB-LT80
全自动立式贴标机
Automatic Vertical Labeling Machine 66

63 YB-WT200
全自动卧式贴标机
Automatic Horizontal Labeling Machine 67

64 YB-PT120
全自动平面贴标机
Automatic Flat Labeling Machine 68

65 YB-ST60
全自动双面贴标机
Automatic Double Sides Labeling Machine 69

66 YB-TB200
全自动套标机
Automatic Shrink Sleeve Labeling Machine 70

67 YB-WZ80/WZ100
全自动装盒机
Automatic Cartoning Machine 71

68 YB-LZ50
旋转式装盒机
Rotary Type Cartoning Machine 72

69 YB-SW400
全自动三维包装机
Automatic Cellophane Film Wrapping Machine 73

70 YB-FS800
全自动封切收缩机
Automatic Sealing and Cutting Shrinkage Machine 74

71 YB-CD/FO/UR
全自动激光喷码机
Automatic Laser Marking Machine 75

72 YB-PM17
全自动油墨喷码机
Automatic Inkjet Printer 76

73 YB-DK500/DK650/TK430/TK500/FK430/FK500/FK650
全自动开箱机
Automatic Carton Erector 77

74 YB-ZXA/ZXB
全自动智能机械手装箱机
Automatic Intelligent Robotic Arm Packing Machine 78

75 YB-MD16/MD20/MD25/MD30/MD40
协作码垛工作站
Collaborative Palletizing Workstation 79

76 YB-ZF5050/ZF6050
全自动折盖封箱机
Automatic Carton Folding and Sealing Machine 80

77 附属设备
Accessory Equipment 81/84

我们能为您做什么.....
What can we do for you...

为您提供专业包装设备解决方案
Providing you with professional packaging equipment solutions

YANG洋 BANG邦®

可行性分析
Feasibility analysis

一旦项目确定下来，依照客户的实际需求，对产品做出专业的分析报告，同时进行投资成本、运行成本、保养成本的预算，并给出整体解决方案。

Once the project is determined, in accordance with the actual needs of customers, a professional analysis report on the product will be made. At the same time, budgets for investment cost, operating cost and maintenance cost will be made, and provide an overall solution.

工程设计
Engineering design

引入国际先进设计理念，充分结合自身优势，对工程进行细致的规划与设计，提供具有价值的方案，以确保各个步骤得以有效实施。

Introduce advanced international design concepts, fully combine our own advantages, conduct detailed planning and design for engineering, provide valuable engineering schemes, and ensure the effective implementation of each step.

产品制造
Product manufacturing

经过核准的生产图纸是生产制造的依据，所有非现场制造的设备必须由我们的质量控制负责人进行鉴定，以确保其符合严格的规定。

The approved production drawings serve as the basis for manufacturing. All off-site manufactured equipment must be certified by our quality controller to ensure compliance with strict regulations.

工程安装
Engineering installation

从单一的设备安装到整体工程安装均符合安装相关标准。在验收环节，我们凭借多年的经验全面、细致地检查机器质量，为后期的运行奠定基础从而确保设备的长期稳定性。

From single equipment installation to overall engineering installation all meet the installation standards. In the acceptance section we rely on many years of experience to comprehensively and carefully check the quality of the machine, laying the foundation for the later operation, thus ensuring the long-term stability of the equipment.

生产管理顾问
Production and management consultation

为确保生产的正常进行，我们可以针对单机或生产线拟定维护保养计划，并按客户的要求对设备进行维护保养和提供配件。

In order to ensure the normal operation of the production, we can draw up a maintenance plan for individual machine or production line, and carry out maintenance and supply spare parts for the equipment according to the customer's requirements.

技术指导
Technical guidance

我们为客户提供技术培训，培训内容包括机器的结构和维护、机器的控制和操作。我们的技术人员和销售人员会对客户进行在线指导和培训，经过培训后，客户的技术人员可以很好地掌握操作和维护。

We offer technology training to customers.The content of training is structure and maintenance of machine, control and operation of machine. Our technician and salesman will guide and train customer online, after training, customer's technician could master the operation and maintenance well.

YB–XP300+HX6+K16A

全自动口服液灌装生产线 Automatic Oral Liquid Filling Production Line



YB-XP300　　YB-HX6　　YB-K16A

用途 Application :

该机主要应用于口服液、IVD体外诊断试剂、能量饮料的灌装旋/轧盖，适用于直管瓶。

This machine is mainly used for filling and capping/crimping oral liquid, IVD in vitro diagnostic reagents, and energy drink, suitable for straight tube bottles.

性能特点 Performance feature：

1.工作流程：自动洗瓶→烘干灭菌→转盘式跟踪灌装→加盖→旋/轧盖。

2.PLC控制，彩色触摸屏显示。

3.主要电器均采用国外知名品牌。

4.机器外壳由优质304不锈钢材质制成，符合GMP标准。

1. Workflow: automatic washing bottle→drying and sterilizating→turntable type tracking filling→adding cap→capping/crimping.

2. PLC control, color touch screen display.

3. Main electrical components adopt foreign well-known brands.

4. Machine frame is made by high quality 304 stainless steel, meets GMP standard.

YB–XP300+HX6+K16B

全自动口服液灌装生产线 Automatic Oral Liquid Filling Production Line



YB-XP300　　YB-HX6　　YB-K16B

用途 Application :

该机主要应用于口服液、糖浆、能量饮料的灌装旋/轧盖。

This machine is mainly used for filling and capping/crimping oral liquid, syrup and energy drink.

性能特点 Performance feature：

1.工作流程：自动洗瓶→烘干灭菌→直线式跟踪灌装→加盖→旋/轧盖。

2.PLC控制，彩色触摸屏显示。

3.主要电器均采用国外知名品牌。

4.机器外壳由优质304不锈钢材质制成，符合GMP标准。

1.Workflow: automatic washing bottle→drying and sterilizationg →linear type tracking filling→adding cap→capping/crimping.

2.PLC control, color touch screen display.

3.Main electrical components adopt foreign well-known brands.

4.Machine frame is made by high quality 304 stainless steel, meets GMP standard.

YB–JX80+HX6+F2

低速西林瓶粉剂联动生产线 Low Speed Vial Bottle Powder Linkage Production Line







YB-JX80　　YB-HX6　　YB-F2

用途与特点 Application and characteristics：

该联动线适用于2-100ml西林瓶进行洗瓶、烘干、粉剂灌装、封口，通过绞龙式超声波洗瓶机、高温隧道烘箱、灌装机、封口机组成联动线，也可单机使用。本机组采用PLC、触摸屏联动联控，机构合理，自动化程度高。

The linkage line is suitable for 2-100ml vial bottles for bottle washing, drying, powder filling and sealing. The linkage line is formed by the spiral ultrasonic bottle washing machine, high temperature tunnel oven, filling machine and sealing machine, and a single machine can also be used. The unit adopts PLC, touch screen linkage control, reasonable mechanism, high degree of automation.

YB–XP300+HX6+Y10

高速西林瓶液体联动生产线 High Speed Vial Bottle Liquid Linkage Production Line



YB-XP300　　YB-HX6　　YB-Y10


用途与特点 Application and characteristics：

本联动线由立式超声波洗瓶机、隧道式热风循环灭菌烘箱、回转跟踪灌装上塞封口机组成，本联动生产线适用于2-100ml西林瓶的清洗、烘干灭菌、灌装、上塞、轧盖的生产，可完成药品(食品、保健品、化妆品)生产中液体制剂中的清洗、烘干、灭菌、灌装轧盖等工艺步骤的联动运行，联动线设计理念先进，结构合理，性能稳定。为制药、保健、食品、化妆品厂家的生产提供设备技术保障，符合现行药品生产管理规范(GMP)的相关要求。

This linked line is composed of vertical ultrasonic bottle washing machine, tunnel type hot air circulation sterilization oven, rotary tracking filling, plugging and sealing machine. This linkage production line is suitable for the cleaning, drying and sterilization, filling, plugging and capping production of 2-100ml vial bottles. It can complete the linkage operation of the cleaning, drying, sterilization, filling and capping process of liquid preparations in the production of drugs (food, health care products, cosmetics). The linkage line has advanced design concept, reasonable structure and stable performance. This line provide technical support for the production of pharmaceutical, health care, food and cosmetics manufacturers, meets the requirement of the current drug production management practice (GMP).

YB–LP300+SL8/16+T160+CG120+LF70+LT80

全自动数粒灌装生产线 Automatic Counting Filling Production Line

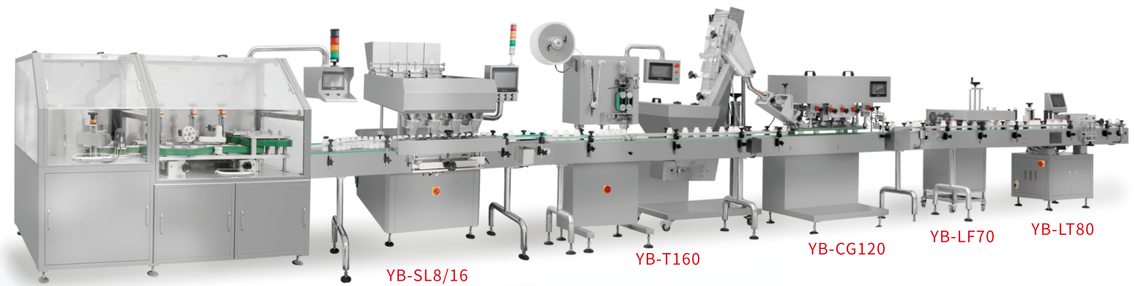







用途 Application :

本机适用于药品、糖果、速冻食品、坚果、五金、玩具等颗粒型物料的计数包装。

This machine is suitable for counting and packaging granular materials such as drugs, candies, frozen foods, nuts, hardware, toys, etc.

性能特点 Performance feature:

1.工作流程：自动理瓶→数粒灌装→干燥剂投放→自动旋盖→铝箔封口→贴标。
2.PLC控制系统，彩色触摸屏显示。
3.适用范围广，同一台设备可以对不同形状、尺寸的产品进行数粒分装。
4.数片精准，采用独立的光学检测系统，从而保证高水准数粒精度和速度。
5.采用多级振动送料，每级可单独调速，产品分游速度更快，姿态更加均匀流畅。
6.配有缺瓶、堵瓶检测光电，能有效的控制整个系统的正常运行，无瓶、堵瓶自动停机，待恢复后自动运行。
7.故障自动诊断，全面实时监控报警和显示。
8.具备参数存储功能，更换产品时无需再调试，直接调用原来贮存的参数。
9.可提供8、12、16、24、32 等多种不同的供料轨道组合，以适应不同的需求。
10.主要电器均采用国外知名品牌。
11.机器外壳由优质304不锈钢材质制成，符合GMP标准。

1.Workflow: automatic bottle sorting→counting and filling→feeding desiccant→automatic capping→aluminum foil sealing→labeling.
2.PLC control, color touch screen display.
3.Wide applicability, the same equipment can count and pack multiple particles of products with different shapes and sizes.
4.Accurate counting, using an independent optical detection system to ensure high-level counting accuracy and speed.
5.Adopts multi-level vibration feeding, each level speed can be adjusted separately. The product has a faster distribution speed and a more even and smooth posture.
6.Equipped with photoelectric detection for missing or blocked bottles, it can effectively control the normal operation of the entire system. If there are no bottles or blocked bottles, it will automatically shut down and run automatically after recovery.
7.Automatic fault diagnosis, comprehensive real-time monitoring, alarm and display.
8.Equipped with parameter storage function, no need to debug when replacing the product, and the original stored parameters can be directly called.
9.Can provide various combinations of feeding tracks, such as 8, 12, 16, 24, 32, etc., to meet different needs.
10.Main electrical components adopt foreign well-known brands.
11.Machine frame is made by high quality 304 stainless steel, meets GMP standard.

YB–GP800/GP1200

供瓶机 Bottle Feeding Machine







用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，主要用于对圆瓶、方瓶的整理及输送。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, mainly for sorting and conveying round and square bottles.

性能特点 Performance feature:

1.人工将瓶子放入圆形转盘上，转盘转动将瓶子有续拨入输送带。
2.具备无级调速功能。
3.机器外壳部分由优质304不锈钢材料制成，符合GMP标准。

1.Put the bottles on the rotating disc manually, then it will set the bottles into the conveyor in order.
2.Equipped with stepless speed regulation function.
3.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-GP800	YB-GP1200
瓶子尺寸/Bottle size	Φ: 20-150mm, H: 50-300mm	Φ: 20-150mm, H: 50-300mm
速度/Speed	20-100 bottles/min	20-100 bottles/min
功率/Power	0.2 KW	0.4 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈100kg	≈130kg
外形尺寸/Overall dimension	About L1200 × W800 × H1300mm	About L1600 × W1200 × H1300mm

YB–TP800/TP1200

屯瓶机 Bottle Collecting Machine







用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，主要用于对圆瓶、扁瓶、方瓶的收集。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, mainly for collecting round bottles, flat bottles, and square bottles.

性能特点 Performance feature:

1.主要应用于灌装/生产线末端产品的收集。
2.具备无级调速功能。
3.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Mainly used for collecting the product at the end of filling/production line.
2.Equipped with stepless speed regulation function.
3.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-TP800	YB-TP1200
瓶子尺寸/Bottle size	Φ: 20-150mm, H: 50-300mm	Φ: 20-150mm, H: 50-300mm
速度/Speed	20-100 bottles/min	20-100 bottles/min
功率/Power	0.2 KW	0.4 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈90kg	≈120kg
外形尺寸/Overall dimension	About L900 × W800 × H1200mm	About L1300 × W1200 × H1200mm

YB–LPA/LPB

全自动理瓶机 Automatic Bottle Unscrambler



YB-LPA



YB-LPB





用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，主要用于对各种圆形、方形塑料瓶的自动整理和输送。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, mainly for sorting and conveying round and square bottles.

技术参数/Technical parameter:

型号/Model	YB-LPA	YB-LPB
瓶子尺寸/Bottle size	Φ: 20-100mm, H: 40-200mm	
速度/Speed	30-100 bottles/min (根据瓶型而定/Depends on bottle shape and size)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	0.5 KW	1.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈150kg	≈250kg
外形尺寸/Overall dimension	About L1500 × W1200 × H1200mm	About L2100 × W1300 × H1450mm

性能特点 Performance feature:

1.PLC控制，彩色触摸屏显示（选配）。
2.出瓶速度快，节约人工成本。
3.具备满瓶时自动停机、缺瓶时自动启动的功能。
4.瓶子要求：瓶子高度小于瓶身直径的四倍。
5.机器外壳由优质304不锈钢材料制成，符合GMP标准。


1. PLC control, color touch screen display (optional).
2. Fast speed of outputting bottles, saving labor costs.
3. It has function of automatic stopping when full of bottles, automatic starting when lacking bottles.
4. Bottle requirements: bottle height < bottle body diameter x 4.
5. Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–LPC

全自动理瓶机 Automatic Bottle Unscrambler





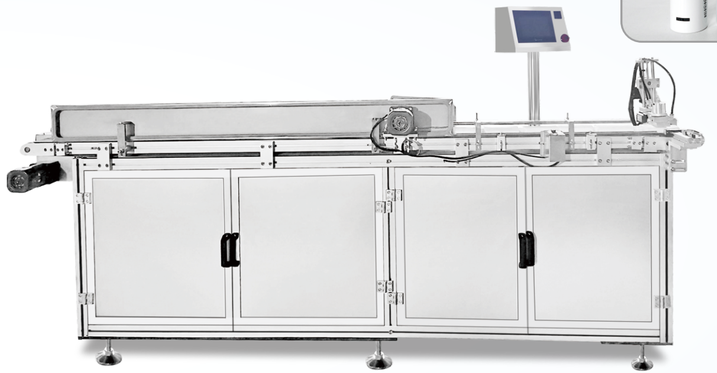

技术参数/Technical parameter:

型号/Model	YB-LPC
瓶子尺寸/Bottle size	L: 50-150mm, W: 30-100mm
速度/Speed	20-40 bottles/min (根据瓶型而定/Depends on bottle shape and size)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈300kg
理瓶仓尺寸/Unscrambler hopper size	L1000-1500mm, W1000-1300mm (可定制/Can be customized)
外形尺寸/Overall dimension	About L2100 × W1400 × H1600mm

用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，
用于对各种圆瓶、扁瓶、方瓶、细长瓶的自动整理和排列。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, and is used for automatic sorting and arrangement of various round bottles, flat bottles, square bottles, and slender bottles.

性能特点 Performance feature:

1.工作流程：理瓶→输送→抓取及翻转→输出。
2.PLC控制，彩色触摸屏显示。
3.出瓶速度快，节约人工成本。
4.具备满瓶时自动停机、缺瓶时自动启动的功能。
5.机器外壳由优质304不锈钢材料制成，符合GMP标准。


1.Workflow: bottle sorting→conveying→grabbing and flipping→output.
2.PLC control, color touch screen display.
3.Fast speed of outputting bottles, saving labor costs.
4.It has the function of automatic shutdown when full of bottles and automatic start when lacking bottles.
5.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–LP300

全自动理瓶机 Automatic Bottle Unscrambler







用途与特点 Application and characteristics：

直线理瓶机是高速生产线的最佳辅助。精密坚固的机体设计，采用内置式的储料空间与理瓶转盘，不但节省空间，更能大幅度降低机器运转产生的噪音。

The linear bottle unscrambler is the best assistant to the high-speed production line. Precise and solid body design, the use of built-in storage space and bottle turntable, not only save space, but also greatly reduce the noise generated by machine operation.

技术参数/Technical parameter:

型号/Model	YB-LP300
适应规格/Applicable specification	瓶体外径 Outer diameter of bottle:25-98mm,瓶高 Height of bottle:45-200mm
产量/Capacity	最高速度 Maximum 300 bottles/min(与产品规格有关/Depends on product specification)
电源/Power supply	1Ph. 220V, 50/60Hz
功率/Power	2.5 KW
工作气压/Working air pressure	0.5-0.7Mpa
耗气量/Air consumption	120L/min(清洁空气/Clean air)
净重/Net weight	About 660kg

YB–XP300

全自动洗瓶机 Automatic Bottle Washing Machine





用途与特点 Application and characteristics：

本机适用于制药、保健品厂管制或模制抗生素瓶的清洗，也可用于针剂安瓿或口服液瓶的清洗。本机为立式结构，采用机械手夹瓶和喷管作往复跟踪的方式，利用超声波清洗和水气交替清洗的原理，对容器进行清洗。破瓶率低，通用性广，运转平稳，水气管路不交叉污染，符合GMP要求。

This machine is suitable for pharmaceutical, health products factory control or mold antibiotic bottle cleaning, can also be used for injection ampoule or oral liquid bottle cleaning. The machine is a vertical structure, using the robot arm to clamp the bottle and nozzle for reciprocating tracking, ultrasonic cleaning and alternating water and gas cleaning, to clean the container. Low broken bottle rate, wide versatility, smooth operation, no cross contamination of water and gas pipeline, meets GMP requirements.



技术参数/Technical parameter:

型号/Model	YB-XP300
适应规格/Applicable specification	2-50ml
产量/Capacity	60-300 bottles/min
回用水流量/Recycled water flow	0.6-0.8m^3/h
纯化水流量/Purified water flow	0.6-0.8m^3/h
注射水耗量/Injection water consumption	0.6m^3/h
净化压缩空气耗量/Purified compressed air consumption	30m^3/h
超声波功率/Ultrasonic power	2.0 KW
工作气压/Working air pressure	0.2-0.25Mpa
电源/Power supply	3Ph. 380V, 50/60Hz
功率/Power	4.0 KW
外形尺寸/Overall dimension	About L2200xW2200xH1700mm

YB–XP350

圆盘式洗瓶机 Disc Type Bottle Washing Machine







用途与特点 Application and characteristics：

本机适用于各类玻璃瓶的清洗,采用多头圆盘式结构,通过分瓶机构将瓶子送至等分钳口,将瓶子夹紧后分别经纯化水-净化压缩空气多次内外冲洗完成洗瓶。

本机结构简单,动作可靠,符合GMP要求,是制药企业和保健品生产厂家的理想设备。

This machine is suitable for the cleaning of all kinds of glass bottles. It adopts multi-head disc structure. The bottle is sent to the mouth of the bisecting pliers through the bottling mechanism, and the bottle is rinsed inside and outside by purified water and purified compressed air for several times.


This machine is simple in structure, reliable in action, in line with GMP requirements, is the ideal equipment for pharmaceutical enterprises and health products manufacturers.

技术参数/Technical parameter:

型号/Model	YB-XP350
适应规格/Applicable specification	5-1000ml
产量/Capacity	100-350 bottles/min
回用水流量/Recycled water flow	0.8m³/h
注射水耗量/Injection water consumption	0.8m³/h
净化压缩空气耗量/Purified compressed air consumption	40m³/h
工作气压/Working air pressure	0.2-0.25Mpa
电源/Power supply	3Ph. 380V, 50/60Hz
功率/Power	4.0 KW
外形尺寸/Overall dimension	About L1400xW1400xH1850mm

YB–JX80

全自动绞龙式超声波洗瓶机 Automatic Spiral Type Ultrasonic Bottle Washing Machine

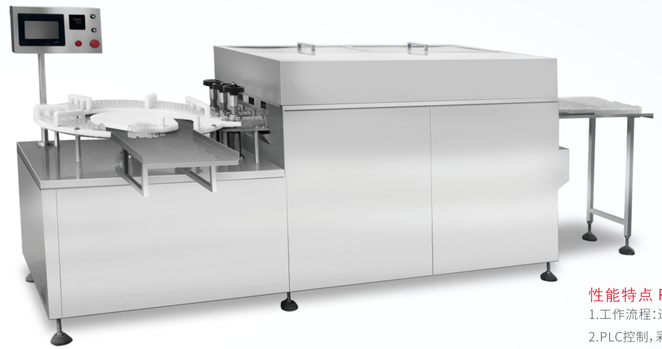





用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，用于对各种材质的圆瓶进行瓶内外清洗。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, and is used for cleaning the inside and outside of round bottles made of various materials.

性能特点 Performance feature：

1.工作流程:进瓶→普通水洗→离子水洗→气洗→烘干(选配)→输出。

2.PLC控制，彩色触摸屏显示。

3.先进的轨道传动技术，使瓶子的清洗和输送更加顺畅，无挤瓶、无破瓶。

4.可添加超声波洗瓶功能(选配)。

5.主要电器均采用国外知名品牌。

6.机器外壳由优质304不锈钢材料制作，符合GMP标准。

1.Workflow: bottle feeding → ordinary water washing → ionic water washing → gas washing → drying (optional) → output.

2.PLC control, color touch screen display.

3.Advanced track transmission technology makes bottle cleaning and transportation smoother, with no jam or breakage.

4.Ultrasonic bottle washing function can be added (optional).

5.Main electrical components adopt foreign well-known brands.

6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-JX80
适应规格/Applicable specification	30-500ml
产量/Capacity	60-100 bottles/min
回用水流量/Recycled water flow	0.5-1 m³/h
纯化水流量/Purified water flow	0.5-0.6m³/h
净化压缩空气耗量/Purified compressed air consumption	0.6m³/min
工作气压/Working air pressure	0.2-0.3 Mpa
电源/Power supply	3Ph. 380V, 50/60Hz
功率/Power	3.0 KW
外形尺寸/Overall dimension	About L2000xW1100xH1500mm

YB–ZX100

全自动转鼓式洗瓶机 Automatic Rotary Drum Type Bottle Washing Machine







用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，用于对各种材质的圆瓶、方瓶进行瓶内外清洗。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, and is used for cleaning the inside and outside of round and square bottles (which are) made of various materials.

性能特点 Performance feature:

1.工作流程：供瓶→普通水洗→离子水洗→气洗→输出。
2.PLC控制，彩色触摸屏显示。
3.机器耗水量少，洗后瓶子洁净度高。
4.可添加超声波洗瓶功能（选配）。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制作，符合GMP标准。


1.Workflow: bottle feeding→ordinary water washing→ionic water washing→gas washing→output.
2.PLC control, color touch screen display.
3.Less water consumption, the cleanliness of the bottle is high after washing.
4.Ultrasonic bottle washing function can be added (optional).
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-ZX100
瓶子尺寸/Bottle size	Φ: 20-100mm, H: 30-200mm (可定制/Can be customized)
速度/Speed	30-100 bottles/min
工作气压/Working air pressure	0.6-0.8Mpa
耗气量/Gas consumption	15m^3/h
循环用水量/Circulating water consumption	1.0-2.0m^3/h
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈500kg
外形尺寸/Overall dimension	About L1500 × W1100 × H1500mm

YB–LX110/LX220

全自动单/双螺杆洗瓶机 Automatic Single/Double Screw Type Bottle Washing Machine

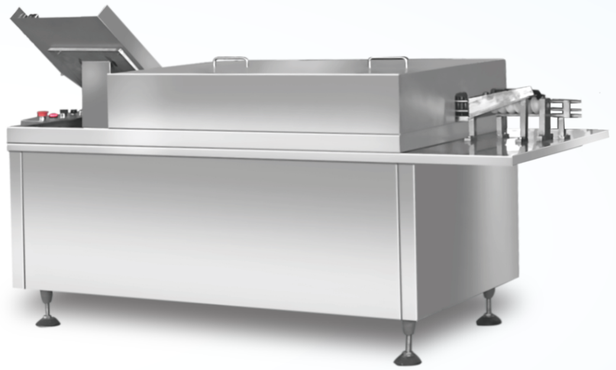





用途 Application :

该机广泛应用于药品、食品、化妆品、日用品等行业，用于对各种材质的圆瓶进行瓶内外清洗。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, and is used for cleaning the inside and outside of round bottles made of various materials.

性能特点 Performance feature:

1.工作流程：进瓶→普通水洗→离子水洗→气洗→烘干(选配)→输出。
2.PLC 控制，彩色触摸屏显示。
3.先进的轨道传动技术，使瓶子的清洗和输送更加顺畅，无挤瓶、无破瓶。
4.可添加超声波洗瓶功能(选配)。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制作，符合GMP标准。

1. Workflow: bottle feeding→ordinary water washing→ionic water washing→gas washing→drying (optional)→output.
2. PLC control, color touch screen display.
3. Advanced track transmision technology makes bottle cleaning and transportation smoother, with no jam or breakage.
4. Ultrasonic bottle washing function can be added (optional).
5. Main electrical components adopt foreign well-known brands.
6. Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-LX110	YB-LX220
瓶子尺寸/Bottle size	Φ: 15-40mm, H: 30-110mm (可定制/Can be customized)	
速度/Speed	30-110 bottles/min	60-220 bottles/min
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
耗气量/Gas consumption	0.5m^3/h	1.0m^3/h
功率/Power	3.5KW	7.0KW
电源/Power supply	1Ph. 220V/3Ph. 380V, 50/60Hz	1Ph. 220V/3Ph. 380V, 50/60Hz
净重/Net weight	≈500kg	≈800kg
外形尺寸/Overall dimension	About L2500 × W1100 × H1200mm	About L2500 × W1300 × H1200mm

YB–FX40

全自动洗瓶机 Automatic Washing Machine







用途 Application：

该机广泛应用于药品、食品、化妆品、日用品等行业，用于对各种材质的圆瓶、扁瓶、方瓶进行瓶内外清洗。

This machine is widely used in industries such as pharmaceuticals, food, cosmetics, and daily necessities, and is used for cleaning the inside and outside of round, flat, and square bottles which are made of various materials.

性能特点 Performance feature：

1.工作流程：进瓶→抓瓶及翻转→水洗/气洗→复位→输出。
2.PLC控制，彩色触摸屏显示。
3.出瓶速度快，节约人工成本。
4.机器耗水量少，洗后瓶子洁净度高。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制作，符合GMP标准。


1.Workflow: bottle feeding→grasping and flipping→water washing/gas washing→reset→output.
2.PLC control, color touch screen display.
3.Fast output bottles, saving labor costs.
4.Less water consumption, the cleanliness of the bottle is high after washing.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-FX 40
瓶子材质/Bottle material	玻璃瓶/塑料瓶 Glass/Plastic bottle
瓶子尺寸/Bottle size	Φ: 50-100mmm,H:50-150mm(可定制/Can be customized)
洗瓶方式/Washing method	水洗/气洗 Water washing/air washing
速度/Speed	30-45 bottles/min
工作气压/Working air pressure	0.6-0.8Mpa
耗气量/Gas consumption	0.3m^3/min
耗水量/Water consumption	1.5m^3/h
功率/Power	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈300kg
外形尺寸/0verall dimension	About L2400xW1300xH1950mm

YB–SM

隧道式水浴(巴氏)灭菌机 Tunnel Type Water Bath (Pasteurization) Sterilization Machine

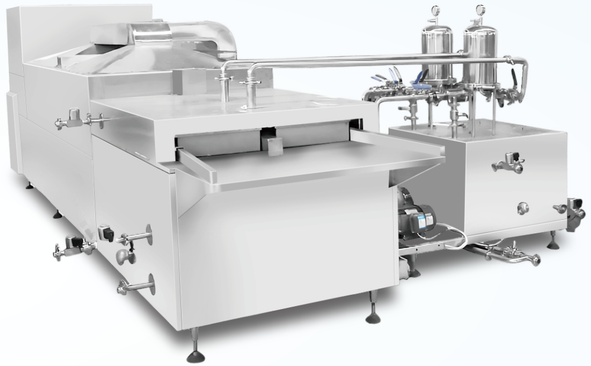









技术参数/Technical parameter:

型号/Model	YB-SM
适用瓶子/Applicable bottle	玻璃瓶 /Glass bottle
产量/Capacity	160-320 bottles/min
蒸汽压力/Steam pressure	0.4-0.5Mpa
冲洗水压力/Flushing water pressure	0.2-0.25Mpa
耗水量/Water consumption	0.5m^3/h
温度/Temperature	65-95℃
灭菌时间/Sterilization time	>35mins
功率/Power	8 KW
电源/Power supply	3Ph. 380V, 50/60Hz
外形尺寸/Overall dimension	About L(6000-15000)x W1200 xH1400mm

用途与特点 Application and characteristics：

本机是安剖瓶、口服液瓶成品的蒸煮灭菌设备，可替代灭菌器，瓶装送入设备内自动进入高温(65-95℃)水槽进行蒸煮灭菌(配上超声波，效果更佳)，灭菌的同时，可以把附着在瓶上的灰尘、砂粒等杂物清洗干净。本机具有灭菌效果好、生产效率高等优点。

This machine is cooking sterilization equipment for ampoule bottle and oral liquid bottle finished products, can replace sterilizer, convey bottle into machine, then enter to high temperature tank (65-95℃) to do cooking sterilization (effect would be better after equipped with ultrasonic). At the same time, machine can clean he dust, sand and other debris attached to bottles. This machine has advantages of good sterilization effect, fast speed, etc.

YB–PM9000/PM16000/PM22000/PM32000

连续式喷淋灭菌机 Continuous Spray Sterilization Machine





技术参数/Technical parameter:

型号/Model	YB-PM9000	YB-PM16000	YB-PM22000	YB-PM32000
最高杀菌温度/The highest sterilization temperature	100°C			
杀菌输送带宽度/Width of sterilization conveyor belt	1500mm			
输送速度/Conveying speed	110-553mm/min			
加热蒸汽压力/Heating steam pressure	0.4Mpa			
杀菌段长度/Length of sterilization section	9000mm	16000mm	22000mm	32000mm
预冷段长度/Length of precooling section	1200mm	1600mm	1800mm	2200mm
冷却段长度/Length of cooling section	3000mm	5000mm	8000mm	10000mm
加热循环水量/Heating recycling water volume	21m³	25m³	35m³	50m³
功率/Power	9.6 KW	10.6 KW	13.6 KW	16.5 KW
电源/Power supply	3Ph. 380V, 50/60Hz			

用途与特点 Application and characteristics:

连续式喷淋杀菌机，采用循环温水预热、循环热水杀菌、循环温水预冷，再用冷却水喷淋冷却，四段处理形式；具有自动控制杀菌温度、无极可调杀菌时间等优点，能广泛应用于各种瓶装、罐装酸性果汁饮料、电解质饮料、酒类、调味品等产品的杀菌冷却。本设备可根据用户提出的杀菌条件及产量要求进行定制。

The continuous spray sterilization machine is designed based on the absorption and digestion of foreign prototypes. Adopting a four-stage treatment method of preheating with circulating hot water, sterilizing with circulating hot water, precooling with circulating hot water, and then spraying with cooling water for cooling. It has the advantages of automatic control of sterilization temperature and stepless adjustable sterilization time, and can be widely used for sterilization and cooling of various bottled and canned acidic fruit juice drinks, electrolyte drinks, alcoholic beverages, seasonings and other products. This equipment can be customized according to the sterilization conditions and production requirements proposed by the user.

YB–HX2/HX4/HX6

烘箱 Sterilization Oven

用途 Application :

本机广泛应用于各种安剖瓶、西林瓶及其它玻璃容器的干燥灭菌。

This machine is widely used for drying and sterilization all kinds of ampules bottle, vials, and other glass containers.

性能特点 Performance feature:

1.工作流程：进瓶→通过预热区→通过高温区→烘干灭菌→通过冷却区→输出。
2.PLC控制，彩色触摸屏显示。
3.传动系统主要采用不锈钢链条或不锈钢网带，速度可调。
4.电热元件选用优质乳白色石英玻璃管或不锈钢管（选配）为加热元件，具有辐射系数高、能耗低、升温快等特点。
5.设有两个送风口及一个排风口，并设有碟阀风门控制风量。
6.冷却区可添加100级垂直层流洁净装置（选配）。
7.保温材料采用硅酸铝纤维。
8.主要电器均采用国外知名品牌。
9.机器外壳由优质304不锈钢材料制作，符合GMP标准。

1.Workflow: bottle feeding→passing through preheating zone→passing through high-temperature zone→drying and sterilization→passing through cooling zone→output.
2. PLC control, color touch screen display.
3. The transmission system mainly adopts stainless steel chains or stainless steel mesh belts, with adjustable speed.
4. High quality milky white quartz glass tube or stainless steel tube (optional) is selected as the heating element, which has the characteristics of high radiation coefficient, low energy consumption, and fast heating.
5. There are two air supply outlets and one exhaust outlet, and equipped with a disc valve damper to control the air volume.
6. A 100 level vertical laminar flow cleaning device can be installed in the cooling zone.
7. The insulation material adopts aluminum silicate fiber.
8. Main electrical components adopt foreign well-known brands.
9.Machine frame is made of high quality 304 stainless steel, meets GMP standard.









技术参数/Technical parameter:

型号/Model	YB-HX2	YB-HX4	YB-HX6
炉子长度/Length of tunnel	2m	4m	6m
速度/Speed	50-150 mm/s	50-150 mm/s	50-150 mm/s
温度调节范围/Adjustable range of temperature	≤200°C	≤300°C	≤350°C
加热功率/Heating power	18 KW	25 KW	32 KW
电机功率/Motor power	1.1 KW	1.5 KW	2.0 KW
电源/Power supply	3 Ph. 380V, 50/60Hz	3 Ph. 380V, 50/60Hz	3 Ph. 380V, 50/60Hz
净重/Net weight	≈900kg	≈1200kg	≈1500kg
外形尺寸/Overall dimension	About L2300 × W1200 × H2200mm	About L4300 × W1200 × H2200mm	About L6300 × W1200 × H2200mm

YB–DRH/SRH

双门(单门)热风循环烘箱 Double Doors (Single Door) Hot Air Circulation Oven





用途与特点 Application and characteristics：

本机适用于各类胶塞、铝盖及抗生素瓶的灭菌、干燥，采用不锈钢电热管(或蒸汽)加热,直冷式风机热风循环，升温快,灭菌效率高，温度能自动显示并自行设定控制、记录，超温、超时能及时报警。

This machine is suitable for all kinds of rubber plug, aluminum cap and antibiotic bottle sterilization, drying, stainless steel electric tube (or steam) heating, direct cooling fan hot air circulation, fast heating, high sterilization efficiency, temperature can be automatically displayed and self-set control, record, alarm timely when over-temperature or timeout.

技术参数/Technical parameter:

型号/Model	YB-DRH/SRH
生产能力/Production capacity	满足单线需要/Meets single-line needs
温度调节范围/Temperature adjustment range	50-350°C
定时范围/Timing range	0—24 hours
电源/Power supply	3Ph. 380V, 50/60Hz
功率/Power	⩽ 18 KW
外形尺寸/Overall dimensions	根据产量定制/Customized according to capacity

YB–K4

全自动口服液灌装旋/轧盖机 Automatic Oral Liquid Filling and Capping/Crimping Machine







技术参数/Technical parameter:

型号/Model	YB-K4
灌装头数/Filling nozzle number	4
加盖工位数/Adding cap work station	1
旋/扎盖工位数/Capping/Crimping work station	1
灌装量/Filling volume	5-30ml
速度/Speed	40-80 bottles/min
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	2.0 KW
电源/Power supply	1 Ph. 220V, 50/60Hz
净重/Net weight	≈500kg
外形尺寸/Overall dimension	About L1800 × W1600 × H2000mm

用途 Application :

该机主要应用于口服液、IVD体外诊断试剂、能量饮料的灌装旋/轧盖，适用于直管瓶。

This machine is mainly used for filling and capping/crimping oral liquid, IVD in vitro diagnostic reagents, and energy drink, suitable for straight tube bottles.

性能特点 Performance feature：

1.工作流程：螺杆输送进瓶→转盘式跟踪灌装→加塞→加盖→旋/轧盖。
2.PLC控制，彩色触摸屏显示。
3.主要电器均采用国外知名品牌。
4.机器外壳由优质304不锈钢材质制成，符合GMP标准。

1.Workflow: bottle feeding by screw conveyor→turntable type tracking filling→adding inner plug→adding outer cap→capping/crimping.
2.PLC control, color touch screen display.
3.Main electrical components adopt foreign well-known brands.
4.Machine frame is made by high quality 304 stainless steel, meets GMP standard.

YB–K12A/K16A

口服液高速灌封机 High Speed Oral Liquid Filling and Sealing Machine





技术参数/Technical parameter:

型号/Model	YB-K12A	YB-K16A
适用瓶子/Applicable bottle	5-30ml 口服液直管瓶/Oral liquid straight tube bottle	
灌装头数/Filling nozzle number	12	16
加盖工位数/Adding cap work station	1	1
封盖工位数/Sealing cap work station	10	12
速度/Speed	120-200 bottles/min	250-350 bottles/min
灌装误差/Filling error	≤±1%(根据物料而定/Depends on product)	
合格率/Pass rate	≥99%(取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8 Mpa	0.6-0.8 Mpa
功率/Power	4.5 KW	5 KW
电源/Power supply	3 Ph. 380V ,50/60Hz	3 Ph. 380V, 50/60Hz
外形尺寸/Overall dimension	About L3000x W1440 xH1620mm	About L3000x W1440 xH1620mm


用途与特点 Application and characteristics：

本机是口服液生产线中的灌装主机，主要用于对5~30ml易拉盖(或铝塑盖)直管瓶的灌装、上盖、封口。采用网带进瓶，送瓶可靠；十二头(十六头)局部跟踪灌装，不易产生泡沫；电磁振荡送盖，上盖率高。十头(十二头)旋转轧盖，调节方便，性能稳定。该机灌装封口合二为一，设计先进，结构紧凑。

This machine is a filling host in the oral liquid production line, mainly used for filling, adding cap and sealing 5-30ml straight tube bottles with easy to pull cap (or aluminum-plastic cap),Using a mesh belt for bottle feeding ensures reliable bottle delivery. Twelve (or sixteen) heads locally tracking filling, which is not easy to produce foam, and electromagnetic oscillation is used to feed the cap, with high coverage rate. Ten (or twelve) heads planetary sealing, easy to adjust, stable performance. This machine combine filling and sealing in one, with advanced design and compact structure.

YB–K16B

伺服跟踪灌装封口机 Servo Tracking Filling and Sealing Machine

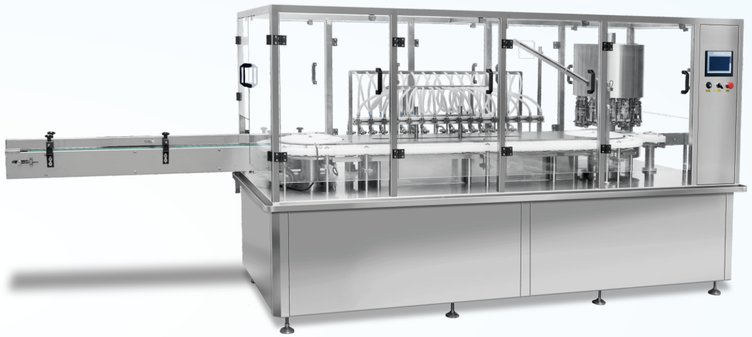







技术参数/Technical parameter:

型号/Model	YB-K16B
灌装头数/Filling nozzle number	16
加盖工位数/Adding cap work station	1
封盖工位数/Sealing cap work station	12
灌装量/Filling volume	50-500ml
速度/Speed	100-200 bottles/min
灌装误差/Filling error	≤±1%(根据物料而定/Depends on product)
合格率/Pass rate	≥99%(取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	5 KW
电源/Power supply	3 Ph. 380V, 50/60Hz
外形尺寸/Overall dimension	About L4500x W1000 xH2000mm


用途与特点 Application and characteristics：


本机是液体生产线中的灌装主机，主要用于对50-500ml玻璃瓶(或塑料瓶)液体灌装。采用6-16头灌装，直线进瓶,送瓶可靠；灌装正确，不易产生泡沫；设计先进，结构紧凑。

This machine is a filling host in the liquid production line, mainly used for liquid filling of 50-500ml glass bottles (or plastic bottles). Using 6-16 heads filling, straight line bottle feeding, which is reliable; Accurate filling, not easy to produce foam, with advanced design and compact structure.

YB–KS2/KS4

全自动卡式注射剂灌装轧盖机 Automatic Cartridge Injection Filling and Crimping Machine

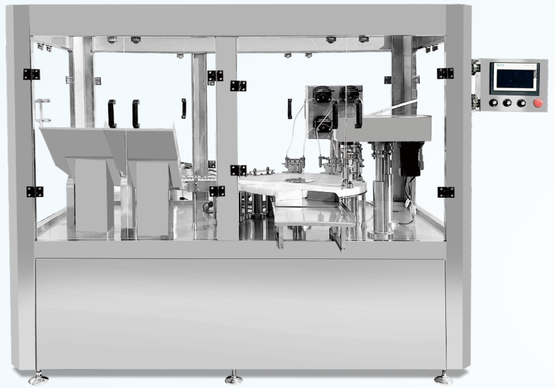



用途 Application：

该机主要应用于卡式注射剂的灌装轧盖。
This machine is mainly used for filling and crimping cartridge injection liquid.

性能特点 Performance feature：

1.工作流程：自动落瓶→加塞→灌装→加盖→轧盖。
2.PLC控制，彩色触摸屏显示。
3.螺杆输送进瓶，跟踪灌装，速度快且不易产生泡沫。
4.采用蠕动泵、活塞泵灌装，计量精确，操控方便。
5.伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
6.灌装系统有回吸/防滴漏装置。
7.无瓶不加塞/不灌装/不上外盖。
8.整机小巧精致、速度快、自动化程度高，大大节省了人力成本。
9.主要电器均采用国外知名品牌。
10.整机外壳由优质304不锈钢材料制作，易清洗，符合GMP要求。

1.Workflow: automatic dropping vials→adding plug→filling→adding cap→crimping.
2.PLC control, color touch screen display.
3.Vial feeding by screw conveyor, tracking filling, fast speed and not easy to produce foam.
4.Peristaltic pump/piston pump filling, accurate measurement, easy to control.
5.Servo motor/mechanical arm control capping, with adjustable torque to prevent damaging caps.
6.Filling system has suction / anti-drip device.
7.No vial no adding plug/no filling/no adding cap.
8.This machine is compact, high speed, high degree of automation, save the labor cost.
9.Main electrical components adopt foreign well-known brands.
10.Machine frame is made of high quality 304 stainless steel, easy to clean, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-KS2	YB-KS4
加塞工位数/Adding plug work station	1	2
灌装头数/Filling nozzle number	2	4
加外盖工位数/Adding outer cap work station	1	1
轧盖头数/Crimping head number	1	2
灌装量/Filling volume	1-3ml	1-3ml
速度/Speed	20-35 bottles/min	30-70 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	
功率/Power	2.8 KW	3.5 KW
电源/Power supply	1 Ph. 220V, 50/60Hz	
净重/Net weight	≈600kg	≈700kg
外形尺寸/Overall dimension	About L2200 × W1800 × H2000mm	About L2400 × W2100 × H2000mm

YB–X2/X4

西林瓶灌装上塞轧盖机 Vial Filling Plugging and Crimpig Machine



加装层流罩款
Equipped with Laminar Flow Hood



未加装层流罩款
Without Laminar Flow Hood







用途与特点 Application and characteristics：

本机为西林瓶灌装、上盖、封口机，主要用于对1~50ml的西林瓶进行液体灌装，采用供瓶盘或料斗进瓶，四头灌装，气缸上塞，自动上盖，三刀离心轧盖。

This machie is a vial filling, adding plug, adding cap and sealing machine, mainly used for liquid filling and sealing of 1-50ml vials; it adopts vial feeding tray or hopper feeding, four heads filling, cylinder adding plug, automatic capping, and three blades centrifugal crimping.

技术参数/Technical parameter:

型号/Model	YB-X2	YB-X4
灌装头数/Filling nozzle number	2	4
加塞工位数/Adding plug work station	1	2
加盖工位数/Adding cap work station	1	1
扎盖工位数/Crimping work station	1	2
灌装量/Filling volume	1-50ml	1-50ml
速度/Speed	20-35 bottles/min	30-70 bottles/min
灌装误差/Filing error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.0 KW	2.2 KW
电源/Power supply	1 Ph. 220V, 50/60Hz	1 Ph. 220V, 50/60Hz
外形尺寸/Overall dimension	About L1600 × W1300 × H1800mm	About L1800 × W1400 × H2100mm

YB–DJ–1

全自动多功能灯检机(单道) Automatic Multi–function Inspection Machine (Single Channel)



用途 Application :

该机主要应用于玻璃瓶口服液，西林瓶水针粉针，冻干粉，安瓿瓶，卡式瓶的异物提取分析，轧盖检测，瓶身外观检测等。

This machine is mainly used for foreign bodies extraction and analysis, crimp and cosmetic detection functions for glass bottle oral liquid, liquid and powder in vials, frozen powder, ampoules and cartridge bottles.









性能特点 Performance feature:

1.采用专利设计的直线型托辊（塔轮）倾斜运行机构，结构较回转结构灯检机简单方便，维护保养和操作都非常人性化，易学易用。检测精度可进行调节，易操作，前后可进行连线。

2.采用最多7架高速工业相机（德国巴斯勒）利用机器视觉中的边沿提取，形态学，目标跟踪，图像平滑，腐蚀，目标提取等算法实现了瓶体的精确定位，异物提取分析，轧盖检测，瓶身外观检测等功能。

3.口服液进入高速旋转（最高2000RPM）完成扰动动作，结束扰动后进入检测区域，口服液瓶匀速旋转，在惯性作用下，瓶内液体继续旋转，可清晰的看到玻璃屑在重力作用下的下落过程。

4.样品在检测时处于60度的倾斜状态，可使相机正对瓶底拍出非常清晰的样品瓶子底部图片，从而非常容易识别样品瓶子底部的大玻璃、小玻璃渣和其他异物。

5.可对每支药进行分层检测：即轧盖的包边完整性、装量液位检测、瓶身内置物有无杂质、瓶底有无玻璃、根据药液情况即可保证较低的漏检率同时保证较低的误检率。通过对产品的旋转，不同角度的拍照可以达到360度无死角拍摄，满足检测以上描述异物需求。

6.设备设计结构具有超前性、间隙足，为以后的多功能升级以及设备产能的提速留下了空间。

7.安全可靠的操作。设备前面都设有紧急停机功能。防止误操作伤害操作者。做到人性化考虑。

8.配备大容量储存系统可储存5年以上的生产数据，包括操作工名单、开始时间、生产数量，产品标号，次品数量等，所有生产数据可阶段性导出，同时加装UPS电源可在工厂突然停电时保存珍贵生产数据。

9.设备操作台配备无线键盘、鼠标，以及触摸控制屏。满足不同操作者的习惯。

10.设备外罩亚克力有机玻璃门全部能够打开，对于设备的维护保养和日常清理工作非常方便。台面留有清理孔，可将碎玻璃等杂物冲水清理。

技术参数/Technical parameter:

型号/Model	YB-DJ-1
检测速度/Inspection speed	100-450 bottles/min
电源/Power supply	1 Ph. 220V, 50/60HZ
功率/Power	2 KW
净重/Net weight	≈470kg
外形尺寸/Overall dimension	About L3160×W1430×H2150mm

1.Patented linear supporting-rollers run at an angle. Its structure is easier than the rotary one. easy to learn and use. The detection precision is adjustable. Maintenance, operation and changing parts is humanized, very easy. Can be installed in the production line.

2.Equipped with max.7 sets of industrial cameras with high speed (BASLER, made in Germany). Adopting edge detection and extraction in vision, morphology, target tracking, image smoothing, corrosion, target extraction and other calculation realize accuracy orientation, foreign body extraction and analysis, cap and cosmetic detection functions etc.

3.Oral liquid rotates in high speed (Max.2000RPM) to reach disturbance. After disturbance, the bottles come into the detection area, and it rotates at a constant speed, due to inertia, the liquid in the bottle goes on rotating. In this case, we can see the falling process of the glass clearly.

4.During detection, the sample inclines at 60 degrees, the camera can face bottom and take the very clear bottom pictures, it is very easy to identify the big, small glasses and other foreign bodies in the bottom.

5.Detect the oral liquid hierarchically: cap and aluseal presence, position, crimp quality analysis, scratches, level, foreign bodies in the bottle, glass at the bottom according to the liquid, guarantee the lower mis-detection rate and false drop rate. Rotating the bottle can get the photos from different angles without dead angles, satisfy the request to detect above foreign bodies.

6.The design of the structure have certain foresight, the space is very big, leave the station for the future multi-function upgrade and production speeding up.

7.Safe and reliable operation. In the front of the machine there is emergency stop that can avoid hurting the operator due to misoperation.

8.Equipped with mass-storage system, can storage production data more than 5 years include operators, start time, production quantity product number, fault number etc. All the production data can be exported by stage. Equipped with UPS power supply that can save the production data when there is no power supply suddenly in the factory.

9.In the operating station equipped with wireless keyboard, mouse and touch screen, satisfy the habit of different operators.

10.Acrylic plexiglass door in four sides can be opened. Maintenance and daily cleaning is very easy. In the turret there are holes for cleaning glasses and particles.

YB–BDJ–D

冻干粉/水针半自动灯检机 Semi–automatic Inspection Machine For Frozen Powder Liquid



用途 Application :

该机主要应用于检测安瓿瓶水针，西林瓶水针，西林瓶冻干粉，西林瓶粉针的瓶中异物，瓶盖缺陷，冻干粉表面裂纹严重，变色，表面黑点，瓶身裂纹等。

This machine is mainly used for checking foreign bodies in the bottle, cap defect, big cracks in the frozen powder surface, discoloration, black spots in surface, bottle cracks in liquid ampoules, liquid vials, frozen powder vials, powder vials.









YANG洋 BANG邦®

性能特点 Performance feature:

1.丁达尔效应结合黑色背景有利于保护检测人员视力，适于长时间检测。
2.通过上下反光镜片加三组灯光配合，可清楚的检测到瓶中异物、瓶盖缺陷、冻干饼表面裂纹严重、变色、表面黑点、瓶身裂纹等不良品。
3.产品通过检测区域保持匀速自转，有利于全面检测产品是否存在质量问题。
4.采用开放式检测，每个检测部位标注序列号，发现不合格品可以按键剔除。
5.设有脚踏开关，可使设备处于刹车状态，对产品进行严格检查，不放过任何一个不良品。
6.设有倒瓶卡瓶报警装置，防止瓶少时因倒瓶或卡瓶造成碎瓶影响生产。
7.可配备光照计，使灯检人员在适当的灯光照度下进行灯检，减少灯光对人眼的伤害。
8.拥有故障报警功能，便于操作人员快速精确处理故障，提高生产效率。
9.今拥有计数功能，检测产品总数和不合格产品数量在显示屏上同步显示，有利于了解产品质量状况，改进工艺流程。
10.检测速度、瓶体旋转速度可进行无极调整，且运行速度（频率）均在触摸屏上显示。
11.光源的高度、角度、水平度、光照强度均可进行调整。
12.采用德国材质的宽视距放大镜片，使产品放大2.5倍更清晰。
13.采用世界知名品牌电气元件，确保设备运行的稳定性与可靠性。
14.设备主要部件采用优质不锈钢、铝合金和非金属材料，结构合理，造型美观大方。

技术参数/Technical parameter:

型型号/Model	YB-BDJ-D
检测速度/Inspection speed	For frozen power: ⩾90 bottles/min; For liquid: ⩾70 bottles/min
光源照度/Inpection brightness	1000 -5000 LX
电源/Power supply	1Ph. 220V, 50/60Hz
功率/Power	0.5 KW
净重/Net weight	≈200kg
外形尺寸/Overall dimension	About L1410×W1200×H1680mm

1.Tyndall effect optical system with the black background is beneficial for the vision of inspectors, is suitable for long time inspection.
2.Top and bottom mirrors adding three groups of lights can check foreign body in the bottle, cap fault, big crack in the cake surface, discoloration, black dot in the surface, bottle cracks , etc.
3. The products go through the inspection zone, keeping autorotation in constant speed. Inspecting products can be more convenient and roundly.
4. Inspection machine adopts open inspection, every inspection station are marked by number. When find the fault, the fault can be rejected by button (rejection by identified button is patented).
5. Equipped with foot switch, that can let the machine in brake status, get more time to clarify very carefully, do not let off any fault product.
6. Bottle-fall and bottle-block alarm device can avoid broken caused by bottle-fall and bottle-block that affect the production.
7. Can be equipped with illuminometer. Operator can detect the faults in suitable lighting illumination, reduce harm for the eyes.
8. Fault-alarm function is convenient to handle the fault quickly and accurately, improve the productivity.
9. Counting function: number of the total products and the number of the total rejected faults will be displayed accurately and synchronously. This can be beneficial to know the situation of the products quality, and improve the technological process.
10. Inspection speed, the speed of rotary of the bottle can be adjustable by inveter, and the running speed (frequency) can be displayed in the touch screen.
11. The height, angle, levelness and illumination of the light can be adjustable.
12. Magnifying glass with wide range is made of German material, enlarge the product two times more clearly.
13. Adopt the famous imported electrical elements, guarantee the machine stable and reliable.
14. The structure of the machine is made of top-grade stainless steel, aluminum alloy and non-metallic material, reasonable structure, it looks very beautiful.

YB–BDJ–K

口服液半自动灯检机 Semi–automatic Inspection Machine For Oral Liquid



用途 Application :

该机主要应用于检测10-30ml玻璃瓶口服液是否有异物以及存在质量问题。

This machine is mainly used for checking whether there are foreign body and quality problems in 10-30 ml glass bottle oral liquid.

性能特点 Performance feature:

1.通过高速工业相机将产品画面放大反映到触摸屏上，便于肉眼分辨是否含有异物。

2.通过触摸屏检测，触摸剔除，有利于保护检测人员视力，降低劳动强度，适于长时间检测。

3.产品通过检测区域保持匀速自转，有利于全面检测产品是否存在质量问题。

4.可以针对各种不同浓度的产品进行检测，给予最佳解决方案。

5.设有倒瓶卡瓶报警装置，防止瓶少时因倒瓶或卡瓶造成碎瓶影响生产。

6.设有脚踏开关，可使设备处于刹车状态，对产品进行严格检查，不放过任何一个不良品。

7.具有高速扰动功能，可将瓶内液体充分扰动起来，更加清晰的看到异物下落状态。

8.拥有故障自检功能，便于操作人员快速精确处理故障，提高生产效率。

9.拥有计数功能，检测产品总数和不合格产品数量在显示屏上同步显示，有利于了解产品质量状况，改进工艺流程。

10.检测速度、瓶体旋转速度可进行无极调整，且运行速度（频率）均在触摸屏上显示。

11.光源的高度、角度、水平度、光照强度均可进行调整。

12.采用世界知名品牌电气元件，确保设备运行的稳定性与可靠性。

13.设备主要部件采用优质不锈钢、铝合金和非金属材料，结构合理，造型美观大方。

技术参数/Technical parameter:

型号/Model	YB-BDJ-K
检测速度/Inspection speed	⩾100 bottles/min
光源照度/Inpection brightness	1000 -5000 LX
电源/Power supply	1Ph. 220V, 50/60Hz
功率/Power	0.5 KW
净重/Net weight	≈200kg
外形尺寸/Overall dimension	About L2300×W1000×H1900mm

1.Industrial camera with high speed magnifies the product, display photos in the touch screen. It is convenient for eyes to distinguish the foreign body.

2.Adopt touch screen detecting, reject the fault through touching the display. It is beneficial for the vision of inspectors, suitable for long time inspection.

3.The products go through the inspection zone, keeping autorotation in constant speed. Inspecting products can be more convenient and roundly.

4.Can detect the product with different concentration, and give the perfect solution.

5.Bottle-fall and bottle-block alarm device can avoid broken caused by bottle-fall and bottle-block that affect the production.

6.Equipped with foot switch, that can let the machine in brake status, do not let off any fault product.

7.Disturbance with high speed can disturb the liquid in the bottle totally that can see the falling status of the foreign body more clearly.

8.Self-checking fault function is convenient to handle the fault quickly and accurately, improve the productivity.

9.Counting function: number of the total products and the number of the total rejected faults will be displayed accurately and synchronously. This can be beneficial to know the situation of the products quality, and improve the technological process.

10.Inspection speed, the speed of rotary of the bottle can be adjustable by inveter, and the running speed (frequency) can be displayed in the touch screen.


11.The height, angle, levelness and illumination of the light can be adjustable.

12.Adopt the famous imported electrical elements, guarantee the machine stable and reliable.

13.The structure of the machine is made of stainless steel, aluminum alloy and no-metallic material, reasonable structure, it looks very beautiful.

YB–Y2/Y4/Y8/Y10

全自动小瓶液体灌装旋盖机 Automatic Small Bottle Liquid Filling and Capping Machine

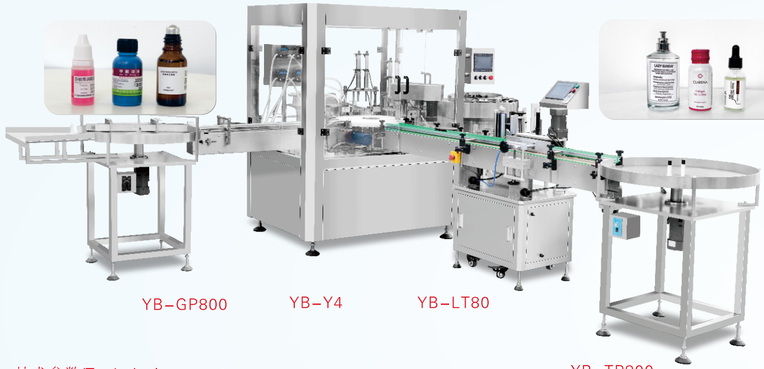





技术参数/Technical parameter:

型号/Model	YB-Y2	YB-Y4	YB-Y8	YB-Y10
灌装头数/Filling nozzle number	2	4	8	10
加塞/喷头工位数/Adding plug/spray pump work station	1	1/2	1/2	8/16
加外盖工位数/Adding outer cap work station	1	1/2	1/2	8
旋盖头数/Capping head number	1	1/2	1/2	8
灌装量/Filling volume	2-150ml	2-500ml	2-500ml	2-150ml
速度/Speed	20-35 bottles/min	30-70 bottles/min	40-80 bottles/min	50-120 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)			
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)			
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.8 KW	3.5 KW	5.0 KW	6.0 KW
电源/Power supply	1 Ph. 220V, 50/60Hz			
净重/Net weight	≈650kg	≈750kg	≈900kg	≈1200kg
外形尺寸/Overall dimension	About L2400 × W1800 × H2000mm	About L2400 × W2500 × H2000mm	About L3000 × W1900 × H2000mm	About L4200 × W1900 × H200mm

用途 Application :

该机主要应用于滴眼液、IVD体外诊断试剂、电子烟油、精油、香水、喷雾剂、蚊香液、指甲油等多种产品的灌装旋盖。

The machine is mainly used for filling and screw capping for eye drops, IVD in vitro diagnostic reagents, e-cigarette oil, essential oil, perfume, spray liquid, mosquito repellent liquid, nail polish and other products.


性能特点 Performance feature:

1.工作流程：自动灌装→加塞/喷头（选配）→加盖→旋/轧盖。
2.PLC控制，彩色触摸屏显示。
3.采用蠕动泵/活塞泵/转子泵灌装，计量精确，操控方便。
4.伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
5.灌装系统有回吸/防滴漏装置。
6.无瓶不灌装/不加塞或喷头/不上外盖。
7.整机小巧精致、速度快、自动化程度高，大大节省了人工成本。
8.主要电器均采用国外知名品牌。
9.整机外壳由优质304不锈钢材料制作，易清洗，符合GMP要求。

1.Workflow: automatic filling→adding plug/spray pump (optional)→adding cap→capping/crimping.
2.PLC control, color touch screen display.
3.Peristaltic pump/piston pump/rotor pump filling, accurate measurement, easy to control.
4.Servo motor/mechanical arm control capping, with adjustable torque to prevent bottle cap damage.
5.Filling system has suction/anti-drip device.
6.No bottle no filling/no adding plug or spray pump/ no adding cap.
7.This machine is compact, high speed, high degree of automation, save the labor cost.
8.Main electrical components adopt foreign well-known brands.
9.Machine frame is made of high quality 304 stainless steel, easy to clean, meets GMP standard.

YB–YG4/YG6

全自动液体灌装旋/轧盖机 Automatic Liquid Filling and Capping/Crimping Machine

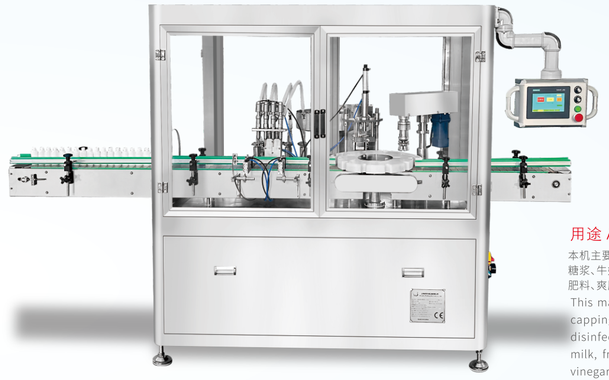





用途 Application :

本机主要应用于酒精、消毒液、注射液、口服液、糖浆、牛奶、果汁、能量饮料、酱油、醋、酒、液体肥料、爽肤水等液体的灌装旋/轧盖。

This machine is mainly used for filling and capping/crimping liquid such as alcohol, disinfectant, injection, oral liquid, syrup, milk, fruit juice, energy drinks, soy sauce, vinegar, wine, liquid fertilizer, toner, etc.

性能特点 Performance feature:

1.工作流程：供瓶/理瓶（选配）→灌装→加盖→旋/轧盖→贴标（选配）→屯瓶（选配）。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用活塞泵/蠕动泵执行灌装，速度快、精度高。
4.灌装时灌装头潜入瓶底，缓慢上升，可有效防止产生气泡。
5.灌装头设有防滴漏装置（选配）。
6.伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。


技术参数/Technical parameter:

型号/Model	YB-YG4	YB-YG6
灌装头数/Filling nozzle number	4	6
加盖工位数/Adding cap work station	1	1
旋/轧盖头数/Capping/Crimping head number	1	1
灌装量/Filling volume	50-1000ml	50-1000ml
速度/Speed	20-40 bottles/min	30-50 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.5 KW	3.0 KW
电源/Power supply	1 Ph. 220V, 50/60Hz	1 Ph. 220V, 50/60Hz
净重/Net weight	≈700kg	≈800kg
外形尺寸/Overall dimension	About L2500 × W1800 × H2000mm	About L3000 × W1800 × H2000mm

1.Workflow: bottle feeding/sorting (optional)→filling→adding cap→capping/crimping→labeling (optional)→bottle collecting (optional).
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Machine uses piston pump/peristaltic pump filling, fast speed and high precision.
4.When filling liquid, the filling nozzles dive into the bottom of bottle, rising slowly, can effectively prevent the generation of bubbles.
5.The filling nozzle was equipped with drip-proof device (optional).
6.Servo motor/mechanical arm control capping, with adjustable torque to prevent bottle cap damage.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–YG8/YG10

全自动液体灌装旋/轧盖机 Automatic Liquid Filling and Capping/Crimping Machine

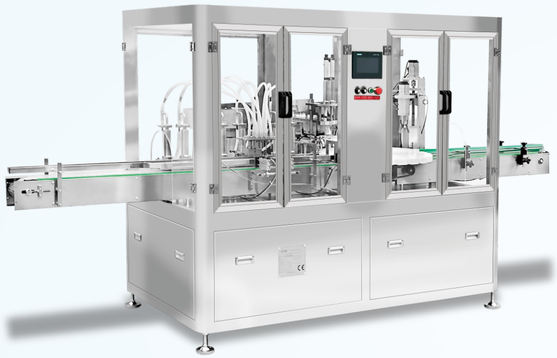





用途 Application :

本机主要应用于酒精、消毒液、注射液、口服液、糖浆、牛奶、果汁、能量饮料、酱油、醋、酒、液体肥料、爽肤水等液体的灌装旋/轧盖。

This machine is mainly used for filling and capping/crimping liquid such as alcohol, disinfectant, injection, oral liquid, syrup, milk, fruit juice, energy drinks, soy sauce, vinegar, wine, liquid fertilizer, toner, etc.

性能特点 Performance feature:

1.工作流程：供瓶/理瓶 (选配)→灌装→加盖→旋/轧盖→贴标 (选配) →屯瓶 (选配)。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用活塞泵/蠕动泵执行灌装，速度快、精度高。
4.灌装时灌装头潜入瓶底，缓慢上升，可有效防止产生气泡。
5.灌装头设有防滴漏装置 (选配) 。
6.伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: bottle feeding/sorting (optional)→filling→adding cap→capping/crimping→labeling (optional)→bottle collecting (optional).
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Machine uses piston pump/peristaltic pump filling, fast speed and high precision.
4.When filling liquid, the filling nozzles dive into the bottom of bottle, then rising slowly, can effectively prevent the generation of bubbles.
5.The filling nozzle was equipped with drip-proof device (optional).
6.Servo motor/mechanical arm control capping, with adjustable torque to prevent damaging caps.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-YG8	YB-YG10
灌装头数/Filling nozzle number	8	10
加盖工位数/Adding cap work station	1/2	1/2
旋/轧盖头数/Capping/Crimping head number	1/2	1/2
灌装量/Filling volume	50-1000ml	50-1000ml
速度/Speed	40-70 bottles/min	50-80 bottles/min
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	4.0 KW	5.0 KW
电源/Power supply	1 Ph. 220V, 50/60Hz	1 Ph. 220V, 50/60Hz
净重/Net weight	≈900kg	≈1000kg
外形尺寸/Overall dimension	About L3200 × W1800 × H2000mm	About L3700 × W1800 × H2000mm

YB–J4A/J6A/J8A

全自动酱体灌装机 Automatic Sauce Filling Machine









用途 Application :

本机适用于各种酱类产品的灌装：如蜂蜜、果酱、花生酱、黄油、番茄酱、巧克力酱、橄榄油、洗发水、沐浴乳、洗衣液等。

This machine is suitable for filling various sauce products, such as honey, jam, peanut butter, butter, tomato sauce, chocolate sauce, olive oil, shampoo, shower gel, laundry detergent, etc.

性能特点 Performance feature:

1.PLC控制，彩色触摸屏显示与操作。
2.采用伺服电机控制活塞泵/转子泵计量，具有精度高、速度快等特点。
3.本机可带加热搅拌装置 (选配)，使产品更均匀、流动性更好，易于灌装。
4.具有无瓶不灌装和自动计数的功能。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.PLC control, color touch screen display.
2.Adopts servo motor control for piston pump/rotor pump metering, it has the characteristics of high accuracy and fast speed.
3.This machine can be equipped with a heating and stirring device (optional), makes the product more uniform, with better fluidity, and easy to fill.
4.It has function of no bottle no filling and automatic counting.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-J4A	YB-J6A	YB-J8A
灌装头数/Filling nozzle number	4	6	8
灌装量/Filling volume	50-1000ml	50-1000ml	50-1000ml
速度/Speed	10-40 bottles/min	15-60 bottles/min	20-80 bottles/min
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)		
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)		
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	5.0 KW	6.0 KW	7.0 KW
电源/Power supply	1 Ph. 220V or 3 Ph 380V, 50/60Hz		
净重/Net weight	≈600kg	≈700kg	≈800kg
外形尺寸/Overall dimension	About L2400 × W1300 × H2300mm	About L2600 × W1300 × H2300mm	About L2800 × W1300 × H2300mm

YB–JGX4/JGX6/JGX8

全自动酱体灌装生产线 Automatic Sauce Filling Production Line



用途 Application :

本机适用于各种酱类产品的灌装生产：如蜂蜜、果酱、花生酱、黄油、番茄酱、巧克力酱、橄榄油、洗发水、沐浴乳、洗衣液等。

This machine is suitable for filling and production various sauce products, such as honey, jam, peanut butter, butter, tomato sauce, chocolate sauce, olive oil, shampoo, shower gel, laundry detergent, etc.

技术参数/Technical parameter:

型号/Model	YB-JGX4	YB-JGX6	YB-JGX8
灌装头数/Filling nozzle number	4	6	8
加盖工位数/Adding cap work station	1	1	1/2
旋盖头数/Capping head number	1	1	1/2
灌装量/Filling volume	50-1000ml	50-1000ml	50-1000ml
速度/Speed	10-40 bottles/min	15-60 bottles/min	20-80 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)		
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)		
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa

性能特点 Performance feature：

1.工作流程：供瓶 (选配)→灌装→加盖→旋/轧盖→贴标 (选配)→屯瓶 (选配)。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用伺服电机控制活塞泵/转子泵计量，具有精度高、速度快等特点。
4.本机可带加热搅拌装置 (选配)，使产品更均匀、流动性更好，易于灌装。
5.伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
6.具有无瓶不灌装、不旋盖和自动计数的功能。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: bottle feeding/sorting (optional)→filling→adding cap→capping/crimping→labeling (optional)→bottle collecting (optional).
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Adopts servo motor to control piston pump/rotor pump measuring, it has the characteristics of high accuracy and fast speed.
4.This machine can be equipped with a heating and stirring device(optional), makes the product more uniform, with better fluidity, and easy to fill.
5.Servo motor/mechanical arm control capping, with adjustable torque to prevent damaging caps.
6.It has function of no bottle no filling and automatic counting.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–J4B/J6B/J8B

全自动酱体灌装旋盖机 Automatic Sauce Filling and Capping Machine



技术参数/Technical parameter:

型号/Model	YB-J4B	YB-J6B	YB-J8B
灌装头数/Filling nozzle number	4	6	8
加盖工位数/Adding cap work station	1	1	1/2
旋盖头数/Capping head number	1	1	1/2
灌装量/Filling volume	50-1000ml	50-1000ml	50-1000ml
速度/Speed	10-40 bottles/min	15-60 bottles/min	20-80 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)		
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)		
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	6.0 KW	7.0 KW	8.0 KW
电源/Power supply	1 Ph. 220V or 3 Ph. 380V, 50/60Hz		
净重/Net weight	≈700kg	≈800kg	≈900kg
外形尺寸/Overall dimension	About L2800 × W1800 × H2300mm	About L3000 × W1800 × H2300mm	About L3200 × W1800 × H2300mm

用途 Application :

本机适用于各种酱类产品的灌装旋/轧盖：如蜂蜜、果酱、花生酱、黄油、番茄酱、巧克力酱、橄榄油、洗发水、沐浴乳、洗衣液等。

This machine is suitable for filling and capping /crimping various sauce products, such as honey, jam, peanut butter, butter, tomato sauce, chocolate sauce, olive oil, shampoo, shower gel, laundry detergent, etc.

性能特点 Performance feature：

1.工作流程：进瓶→灌装→加盖→旋/轧盖。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用伺服电机控制活塞泵/转子泵计量，具有精度高、速度快等特点。
4.本机可带加热搅拌装置 (选配)，使产品更均匀、流动性更好，易于灌装。
5.伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
6.具有无瓶不灌装、不旋盖和自动计数的功能。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the bottle→ filling→ adding cap→ capping/crimping.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Adopts servo motor to control piston pump/rotor pump measuring, it has the characteristics of high accuracy and fast speed.
4.This machine can be equipped with a heating and stirring device (optional), makes the product more uniform, with better fluidity, and easy to fill.
5.Servo motor/mechanical arm control capping, with adjustable torque to prevent damaging caps.
6.It has function of no bottle no filling and automatic counting.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–400C/800C/1200C

全自动胶囊充填机 Automatic Capsule Filling Machine







用途 Application：

本机适应于各种胶囊的全自动充填。

This machine is suitable for filling various capsules automatically.

性能特点 Performance feature：

1.PLC控制系统，彩色触摸屏显示。
2.设备体积小，能耗低。
3.采用凸轮下置设计，增加了压力雾化油泵，保持凸轮槽内润滑，减少磨损，延长了零部件的使用寿命。
4.采用高精度分度器，振动小，工作噪音低于80dB，用真空定位机构使胶囊上机率达到99.9%以上。
5.采用以剂量盘下平面为基准，三维调节，间隙均匀，有效保证装量差异，清洗时非常方便。
6.缺料缺囊及料道出现故障时，自动报警，自动停机，实时每粒计量和累计产量的显示功能。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材质制成，符合GMP标准。


1.PLC control, color touch screen display.
2.Machine is small in size, low in energy consumption.
3.Adopts lower cam design, a pressure atomization oil pump is added to maintain lubrication in the cam groove, reduce wear, and extend the service life of the parts.
4.Use high precision dividers, low vibration and working noise is below 80dB. A vacuum positioning mechanism is used to achieve a capsule loading rate of over 99.9%.
5.Based on the lower plane of the metering plate, a three-dimensional adjustment mechanism with uniform gaps ensures the difference in loading and accurate measurement, making cleaning very convenient.
6.Automatic alarm and shutdown when there is a shortage of material or capsule, or a malfunction in the material channel, and real-time display function for each particle measurement and cumulative production.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made by high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-400C	YB-800C	YB-1200C
胶囊尺寸/Capsule size	00#-4#		
充填剂型/Filling product	粉剂、颗粒/ Powder, granule		
模孔数量/Number of mold hole	3	6	9
速度/Speed (粒/分 Capsules/min)	400	800	1200
装量误差/Filling error	±3% - ±4%		
上机率/Making rate	空胶囊 Empty capsule 99.9%, 满胶囊 Full capsule 99.5%		
噪音/Noise	≤78dB (A)		
工作气压/Working air pressure	0.6-0.8Mpa		
功率/Power		4.0 KW	6.0 KW
电源/Power supply	3Ph. 380V, 50/60Hz		
净重/Net weight		≈600kg	≈1000kg
外形尺寸/Overall dimension	About L980 × W920× H1620mm	About L1110 × W1150 × H1750mm	

YB–G2/G4

全自动跟随式液/酱体灌装机 Automatic Follow–up Liquid/Sauce Filling Machine

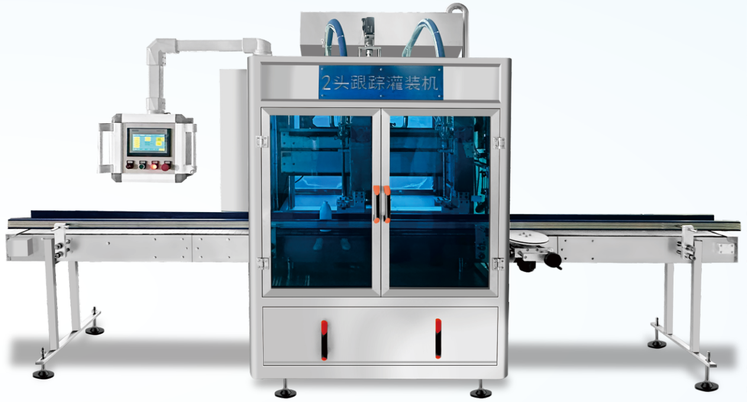



用途 Application：

本机适用于各类液、酱体产品的灌装：如果汁、酸奶、花生酱、蜂蜜、食用油、洗洁精、洗发水、洗衣液、洗手液、沐浴露等。

This machine is suitable for filling various liquid and sauce products, such as juice, yogurt, peanut butter, honey, edible oil, dishwashing detergent, shampoo, laundry detergent, hand sanitizer, shower gel, etc.

性能特点 Performance feature：

1.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
2.采用伺服电机控制活塞泵/转子泵计量，计量精确。
3.跟随式灌装：自动跟踪瓶子，边输送、边灌装，操作简便，效率高。
4.灌装头自带防滴漏装置，灌装过程中不滴液、不拉丝。
5.适用于站立在输送线上不倒的各种规则或异形瓶子。
6.主要电器均采用国外知名品牌。
7.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.PLC control, color touch screen display, machine has function of counting automatically.
2.Adopts servo motor to control rotor pump measuring, very accurate.
3.Follow up filling: automatically tracking bottles, conveying and filling at the same time, easy to operate, and high efficiency.
4.The filling nozzle comes with anti drip device, which prevents dripping or drawing during the filling process.
5.Suitable for various regular or irregular bottles that do not fall while standing on the conveyor line.
6.Main electrical components adopt foreign well-known brands.
7.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-G2	YB-G4
灌装头数/Filling nozzle number	2	4
灌装量/Filling volume	100-5000ml (可定制/Can be customized)	
速度/Speed	5-30 bottles/min	10-60 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	
功率/Power	2.5 KW	4.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	
净重/Net weight	≈500kg	≈600kg
外形尺寸/Overall dimension	About L2400 × W1300 × H2000mm	About L2800 × W1300 × H2000mm

YB–DT30

大桶液/酱体灌装压盖机 Big Barrel Liquid/Sauce Filling and Capping Machine



用途 Application：

本机适用于各类液、酱体产品的灌装加盖：
如洗洁精、洗发水、洗衣液、洗手液、沐浴露、
食用油、花生酱、蜂蜜、涂料等。

This machine is suitable for filling and capping various liquid and sauce products, such as dish-washing detergent, shampoo, laundry detergent, hand sanitizer, shower gel, edible oil, peanut butter, honey, coating, etc.

性能特点 Performance feature：

1.工作流程：进瓶→灌装→加盖→压盖→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用伺服电机控制转子泵计量，速度快、计量精确。
4.灌装头自带防滴漏装置，灌装过程中不滴液、不拉丝。
5.转子泵特别适用于灌装高粘度或含颗粒的物料。
6.适用于站立在输送线上不倒的各种规则或异形瓶子、大桶。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the bottle →filling →adding cap →capping →output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Adopts servo motor to control rotor pump measuring, fast speed and very accurate measuring.
4.The filling nozzle comes with anti drip device, which prevents dripping or drawing during the filling process.
5.The rotor pump is particularly suitable for filling materials with high viscosity or containing particles.
6.Suitable for various regular or irregular bottles/big barrel that do not fall while standing on the conveyor line.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.


技术参数/Technical parameter:

型号/Model	YB-DT30
灌装头数/Filling nozzle number	2
加盖工位数/Adding cap work station	1
灌装量/Filling volume	5-30L (adjustable)
桶尺寸/Barrel size	可根据桶样品制作/Can make according to barrel sample
速度/Speed	2-8 barrels/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	6.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈800KG
外形尺寸/Overall dimension	About L6500 × W1300 × H2000mm

YB–F1/F2

全自动粉剂灌装旋/轧盖机 Automatic Powder Filling and Capping/Crimping Machine



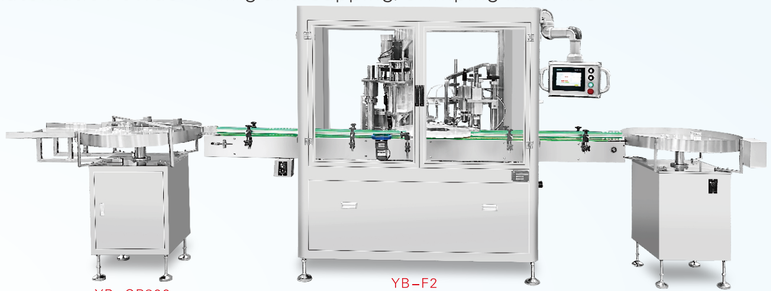

YB–GP800　　YB–F2　　YB–TP800

用途 Application：

本机主要用于蛋白粉、奶粉、胡椒粉、爽身粉、定妆粉、
医药粉等产品的灌装旋/轧盖。

This machine is mainly used for filling and capping products such as protein powder, milk powder, pepper powder, talcum powder, makeup powder, pharmaceutical powder, etc.

性能特点 Performance feature：

1.工作流程：供瓶/理瓶 (选配)→粉剂提升 (选配)→灌装→加塞
(选配)→加盖→旋/扎盖→屯瓶 (选配)。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.组合式透明料箱，无需工具即可方便拆洗。
4.伺服电机控制螺杆，具有计量精度高、速度快等优点。
5.对于多粉尘物料，出料口可安装吸尘装置 (选配)。
6.灌装时，具有同步振动瓶子的功能，使物料在瓶内更加紧实。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: bottle feeding (optional) → powder lifting (optional) → filling → adding plug (optional) → adding cap → capping/crimping → bottle collecting (optional).
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Combination type transparent material box, easy to disassemble and clean without tools.
4.The servo motor controls the auger, which has advantages of high measurement accuracy and fast speed.
5.For materials with high dust content, a dust suction device can be equipped at the discharge port (optional).
6.During filling, it has the function of vibrating the bottle synchronously, making the material more compact inside the bottle.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-F1	YB-F2
灌装头数/Filling nozzle number	1	2
加盖工位数/Adding cap work station	1	1
旋盖头数/Capping head number	1	1
灌装量/Filling volume	5-500ml	5-500ml
速度/Speed	10-20 bottles/min	20-40 bottles/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.0 KW	3.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈500kg	≈600kg
外形尺寸/Overall dimension	About L2400 × W1800 × H2000mm	About L2800 × W1800 × H2000mm

YB–JMA

半自动睫毛膏、眼线液、唇彩灌装旋盖机
Semi Automatic Mascara/Eyeliner/Lip Gloss Filling and Capping Machine





用途 Application :

本机适用于睫毛膏、眼线笔、唇釉、唇彩等美妆产品的灌装旋盖。

This machine is suitable for filling and capping mascara, eyeliner, lip gloss and other cosmetic products.

性能特点 Performance feature:

1.工作流程：自动下管 (选配)→灌装→加内塞 (手工)→压内塞→加毛刷 (手工)→旋盖→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.伺服电机控制活塞泵计量，灌装精度高、速度快。
4.采用伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: automatic tube feeding (optional) →filling→adding inner plug (manual)→pressing inner plug→adding brush (manual)→capping→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Servo motor controls piston pump measuring, with high filling accuracy and fast speed.
4.Using a servo motor/mechanical arm to control capping, with adjustable torque to prevent damaging caps.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-JMA
灌装头数/Filling nozzle number	1
旋盖头数/Capping head number	1
灌装量/Filling volume	2-10ml
速度/Speed	10-40 bottles/min
物料桶容积/Material hopper volume	About 18L
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	4.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈400kg
外形尺寸/Overall dimension	About L1800 × W1500 × H1500mm

YB–JMB

全自动睫毛膏、眼线液、唇彩灌装旋盖机 Automatic Mascara/Eyeliner/Lip Gloss Filling and Capping Machine

用途 Application :

本机适用于睫毛膏、眼线笔、唇釉、唇彩等美妆产品的灌装旋盖。

This machine is suitable for filling and capping mascara, eyeliner, lip gloss, and other cosmetic products.







性能特点 Performance feature:

1.工作流程：自动下管→灌装→加内塞→压内塞→加毛刷→旋盖→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.伺服电机控制活塞泵计量，灌装精度高、速度快。
4.采用伺服电机/机械手控制旋盖，扭力可调，防止瓶盖损伤。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: automatic tube feeding→filling→adding inner plug→pressing inner plug→adding brush→capping→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Servo motor controls piston pump measuring with high filling accuracy and fast speed.
4.Using a servo motor/mechanical arm to control capping, with adjustable torque to prevent damaging caps.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-JMB
灌装头数/Filling nozzle number	1
加塞工位数/Adding inner plug work station	1
加外盖工位数/Adding outer cap work station	1
旋盖头数/Capping head number	1
灌装量/Filling volume	2-10ml
速度/Speed	10-30 bottles/min
物料桶容积/Material hopper volume	About 18L
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	6.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈600kg
外形尺寸/Overall dimension	About L2200 × W1900 × H2000mm

YB–KA/KB

全自动颗粒灌装旋盖机 Automatic Granule Filling and Capping Machine



用途 Application：

本机主要用于灌装颗粒类产品：如糖果、咖啡豆、谷物、坚果、巧克力、麦片、鱼饵等。

This machine is mainly used for packing granule products: such as candy, coffee beans, grains, nuts, chocolates, cereals, chum, etc.



性能特点 Performance feature：

1.工作流程：物料提升 (选配)→组合称计量→灌装→加盖 (选配)→旋盖 (选配)→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.触摸屏能储存多种不同产品的包装工艺参数，当更换产品时可随时使用无需重新设定。
4.设有故障显示系统，出现故障，一目了然，以便及时排除。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: material lifting (optional)→combination weigher measuring →filling→adding cap→capping (optional)→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The touch screen can store various packing parameters of different products, and can be used at any time when changing products without resetting.
4.Equipped with fault display system, any faults can be easily identified for trouble shooting timely.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-KA	YB-KB
计量方式/Measuring method	10头组合称/10 heads combination weigher	
加盖工位数/Adding cap work station	0	1
旋盖头数/Capping head number	0	1
灌装量/Filling volume	30-1000ml	
速度/Speed	10-40 bottles/min	
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	
功率/Power	4.0 KW	5.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	
净重/Net weight	≈1000kg	≈1100kg
外形尺寸/Overall dimension	About L3500 × W3500 × H3800mm	

YB–XG4

全自动四轮旋盖机 Automatic Four–wheel Capping Machine







用途 Application：

本机适用于各种玻璃瓶、塑料瓶的自动旋盖，广泛应用于医药、食品、化妆品、日用品、化工等行业。

This machine is suitable for capping various glass bottles and plastic bottles automatically, and is widely used in medicine, food, cosmetics, daily necessities, and chemical industries.



性能特点 Performance feature：

1.工作流程：进瓶→加盖 (选配)→四轮旋盖→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.可选配盖子提升机或理盖振动盘，实现全自动加盖。
4.旋盖机构间距、高度可以快速调节，操作简单。
5.旋盖轮采用硅橡胶材料制作，扭力可调，避免了因旋盖力太大而损伤瓶盖。
6.主要电器均采用国外知名品牌。
7.机器外壳由优质304不锈钢材料制成，符合GMP标准。


1.Workflow: entering the bottle→adding cap(optional)→ four-wheel capping→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Optional cap elevator or cap vibrating feeder can be equipped to achieve fully automatic adding caps.
4.The spacing and height of the capping mechanism can be adjusted quickly, and the operation is simple.
5.The capping wheels are made of silicone rubber material, with adjustable torque to avoid damaging the bottle cap due to excessive capping force.
6.Main electrical components adopt foreign well-known brands.
7.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-XG4
盖子直径/Cap diameter	Φ: 20-65mm (可定制/Can be customized)
瓶子尺寸/Bottle size	Φ: 30-120mm, H: 50-300mm
速度/Speed	20-50 bottles/min
合格率/Pass rate	⩾ 99% (取决于包材质量/ Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	1.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈400kg
外形尺寸/Overall dimension	About L2000 × W750 × H1600mm

YB–CG120

全自动搓盖机 Automatic Capping Machine

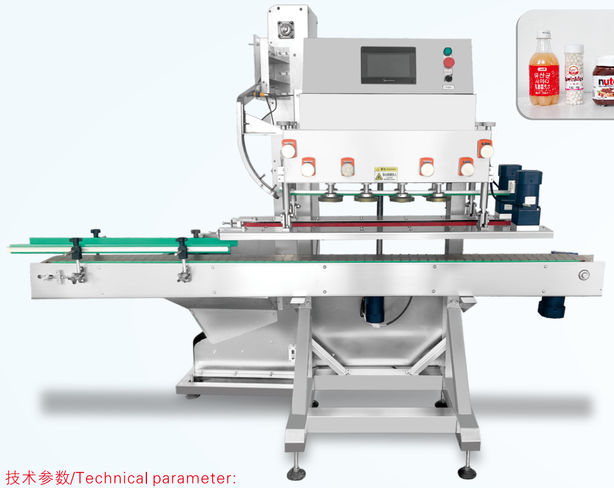







用途 Application :

本机适用于各种玻璃瓶、塑料瓶的自动搓盖，广泛应用于医药、食品、化妆品、日用品、化工等行业。

This machine is suitable for automatic capping of various glass bottles and plastic bottles, and is widely used in industries such as medicine, food, cosmetics, daily necessities, and chemical industries.

性能特点 Performance feature：

1.工作流程：进瓶→加盖 (选配)→搓盖→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.可选配盖子提升机或理盖振动盘，实现全自动加盖。
4.夹瓶皮带可单独调整，使之适合不同高度和形状的瓶子。
5.调节丝杆配数码位置显示功能，降低操作难度避免调节不到位造成的搓盖不紧。
6.搓盖轮扭力可调，避免了因搓盖力太大而损伤瓶盖。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。


1.Workflow: entering the bottle→adding cap (optional)→capping→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Optional cap elevator or cap vibrating feeder can be equipped to achieve fully automatic adding caps.
4.The bottle clamping belt can be adjusted individually to fit different heights and shapes bottles.
5.Adjusting screw has digital position display function, reduces the difficulty of operation and avoids loose rubbing caused by inadequate adjustment.
6.The torque of the capping wheel is adjustable, avoiding damaging caps due to excessive capping force.
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-CG120
盖子直径/Cap diameter	Φ: 30-60mm/ 60-90mm (可定制/Can be customized)
瓶子尺寸/Bottle size	Φ: 30-120mm, H: 50-300mm
速度/Speed	30-120 bottles/min
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈550kg
外形尺寸/Overall dimension	About L2200 × W900 × H1800mm

YB–ZK4/ZK6

全自动真空旋盖机 Automatic Vacuum Capping Machine

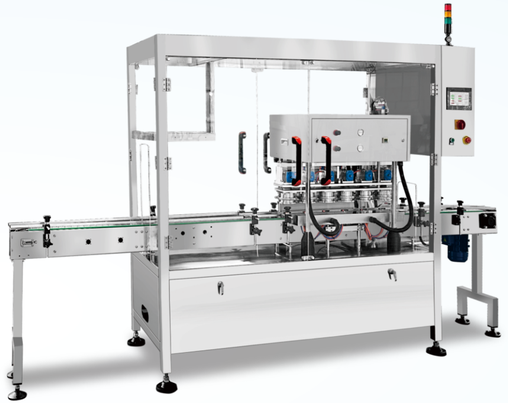





用途 Application :

本机适用于马口铁盖玻璃瓶的真空旋盖：如花生酱、果酱、蛋黄酱、黄油、蜂蜜、辣椒酱、肉酱、罐头等产品。

This machine is suitable for vacuum capping of glass bottle with tinplate cap, such as peanut butter, jam, mayonnaise, butter, honey, chili sauce, meat sauce, canned food, and so on products.

性能特点 Performance feature：

1.工作流程：进瓶→加盖 (选配)→真空旋盖→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.旋盖扭力及真空度可按需设定，确保真空度达标。
4.一款瓶子对应一套模具。
5.可选配皮带式提盖机，高速不伤盖。
6.自带挂盖预旋机构，旋盖更加稳定。
7.挂盖、抱瓶、旋盖机构调节方便，适用多种瓶型。
8.主要电器均采用国外知名品牌。
9.机器外壳由优质304不锈钢材料制成，符合GMP标准。


技术参数/Technical parameter:

型号/Model	YB-ZK4	YB-ZK6
真空旋盖头数/Vacuum capping head	4	6
盖子直径/Cap diameter	Φ: 35-80mm	
瓶子尺寸/Bottle size	Φ: 50-100mm, H: 75-210mm	
真空度/Vacuum degree	-50kpa — -70kpa	
速度/Speed	20-30 bottles/min	30-45 bottles/min
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	
耗气量/Gas consumption	0.5m³/min	
功率/Power	3.5 KW	4.5 KW
电源/Power supply	3Ph. 380V, 50/60Hz	
净重/Net weight	≈550kg	≈650kg
外形尺寸/Overall dimension	About L2300 × W1000 × H2000mm	About L2600 × W1000 × H2000mm

1.Workflow: entering the bottle→adding cap (optional)→vacuum capping→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Torque of capping and vacuum degree can be set as needed to ensure that the vacuum degree meets the standard.
4.Each bottle corresponds to one set mold.
5.Optional belt type cap elevator, high-speed and will not damage caps.
6.Equipped with hanging cap and pre rotation mechanism, the rotation of the cap is more stable.
7.The cap hanging, bottle holding, and cap rotating mechanisms are easy to adjust and suitable for various bottle types.
8.Main electrical components adopt foreign well-known brands.
9.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–FBJ1/FBJ2

全自动转盘式灌装封杯机 Automatic Turntable Type Filling and Sealing Machine

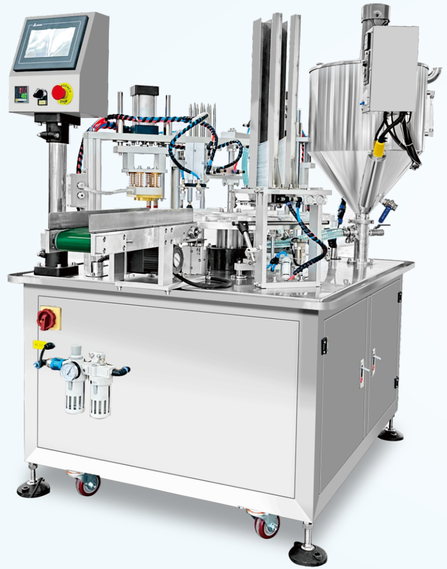

性能特点 Performance feature：

1.工作流程：自动落杯→灌装→加片膜/卷膜→封口→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.可适用于不同塑料、纸质杯子/勺子的封口包装。
4.采用活塞泵计量，速度快、精度高。
5.可选配色带打码机、激光喷码机、物料桶加热搅拌装置、防护罩等。
6.主要电器均采用国外知名品牌。
7.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: automatic dropping cup→filling→adding film→sealing→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.It' s suitable for sealing and packaging different plastic and paper cups/spoons.
4.Adopts piston pump measuring, fast speed and high precision.
5.Optional ribbon coding machine, laser coding machine, heating and mixing device for material hopper, protective cover, etc.
6.Main electrical components adopt foreign well-known brands.
7.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

用途 Application :

本机适用于蜂蜜、果酱、辣椒酱、酸奶、牛奶、奶油、果冻、冰淇淋等产品的灌装封口。

This machine is suitable for filling and sealing products such as honey, jam, chili sauce, yogurt, milk, cream, jelly, ice cream, etc.




技术参数/Technical parameter:

型号/Model	YB-FBJ1	YB-FBJ2
灌装头数/Filling nozzle number	1	2
封杯工位数/Sealing cup work station	1	2
杯子口径/Cup diameter	Φ: 30-100mm (可定制/ Can be customized)	
灌装量/Filling volume	5-300ml (可定制/ Can be customized)	
速度/Speed	10-15 cups/min	20-30 cups/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	1.5 KW	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈350kg	≈480kg
外形尺寸/Overall dimension	AboutL1200 × W1500 × H1700mm	About L1300 × W1600 × H1700mm

YB–XGC1/XGC2

全自动小罐茶封口机 Automatic Sealing Machine for Small Can Tea

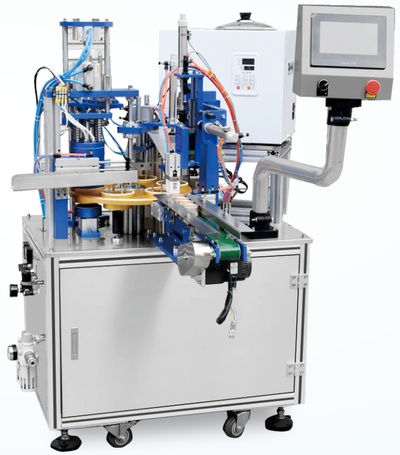

性能特点 Performance feature：

1.工作流程：进罐→茶叶称重分装→充氮气或真空充氮气(选配)→放片膜→封口→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.茶叶分装精准、快速，封口美观。
4.可选配激光喷码机、加装防护罩等。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: can feeding→tea weighing and packaging→nitrogen filling or vacuum nitrogen filling (optional)→adding film→sealing→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Tea packaging is precise and fast, with beautiful sealing.
4.Optional laser coding machine, or install protective cover, etc.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

用途 Application :

本机适用于铝罐、塑料罐和纸罐的茶叶包装。

This machine is suitable for tea packaging in aluminum cans, plastic cans and paper cans.



技术参数/Technical parameter:

型号/Model	YB-XGC1	YB-XGC2
分装称数量/Scale number	1	2
封罐工位数/Sealing can work station	1	2
罐子尺寸/Can size	标准Standard Φ: 48.5mm, H: 25/33/48/50mm	
罐型/Can type	圆柱形，方形，六角形，锥形等形状的铝罐、塑料罐、纸罐、铝箔罐 Aluminum can, plastic can, paper can, aluminum foil can with cylindrical, square, hexagonal, conical and other shapes	
灌装重量/Filling weight	2-10g	2-10g
速度/Speed	10-13 cans/min (单头/single head)	20-26 cans/min (双头/double heads)
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	3.0 KW	3.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈500kg	≈600kg
外形尺寸/Overall dimension	About L2000 × W1500 × H1800mm	About L2300 × W1700 × H1800mm

YB–FBF1/FBF2

全自动咖啡胶囊填充封口机 Automatic Coffee Capsule Filling and Sealing Machine

用途 Application :

本机适用于咖啡粉、蛋白粉、奶粉等各种粉类产品的自动填充和封口。
This machine is suitable for automatic filling and sealing of various powder products such as coffee powder, protein powder, milk powder, etc.





性能特点 Performance feature:

1.工作流程:自动落杯→螺杆计量灌装→充氮气(选配)→放片膜/卷膜→封口→输出。
2.PLC控制,彩色触摸屏显示,机器具有自动计数功能。
3.灌装精准、快速,操作简单。
4.可选配激光喷码机、加装防护罩等。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成,符合GMP标准。

1.Workflow: automatic dropping cup→auger measuring and filling→nitrogen filling (optional)→adding film→sealing→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Filling is accurate and fast, simple operation.
4.Optional laser coding machine, or install protective cover, etc.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.




技术参数/Technical parameter:

型号/Model	YB-FBF1	YB-FBF2
灌装头数/Filling nozzle number	1	2
封杯工位数/Sealing cup work station	1	2
杯子口径/Cup diameter	Φ: 30-100mm (可定制/ Can be customized)	
灌装量/Filling volume	5-100g (需更换相应配件/Need to change related parts)	
速度/Speed	10-15 cups/min	20-30 cups/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	1.5 KW	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈350kg	≈480kg
外形尺寸/Overall dimension	About L1000 × W1300 × H1700mm	About L1200 × W1500 × H1700mm

YB–FBJ4/FBJ6/FBJ8

全自动直线式灌装封口机 Automatic Linear Type Filling and Sealing Machine

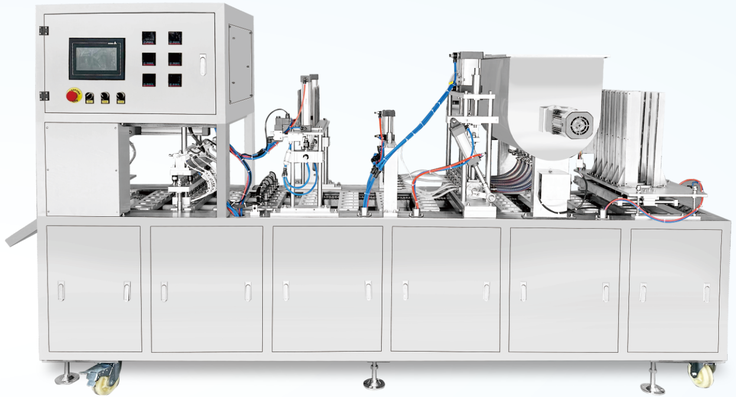





用途 Application :

本机适用于蜂蜜、果酱、辣椒酱、豆浆、八宝粥、果冻、酸奶、牛奶、冰激凌等液体或酱体产品的灌装生产。

This machine is suitable for filling and production of liquid or sauce products such as honey, jam, chili sauce, soybean milk, mixed congee, jelly, yogurt, milk, ice cream and other products.

性能特点 Performance feature:

1.工作流程:自动落杯→灌装→打码(选配)→放膜→封口→输出。
2.PLC控制,彩色触摸屏显示,机器具有自动计数功能。
3.灌装精准、快速,操作简单。
4.可选配激光喷码机、加装防护罩等。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成,符合GMP标准。

1.Workflow: automatic dropping cup→filling→coding (optional)→adding film→sealing→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Filling is accurate and fast, simple operation
4.Optional laser coding machine, or install protective cover, etc.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.


技术参数/Technical parameter:

型号/Model	YB-FBJ4	YB-FBJ6	YB-FBJ8
杯型/Cup type	4杯型4 cups type	6杯型 6 cups type	8杯型 8 cups type
杯子口径/Cup diameter	Φ: 30-100mm (可定制/ Can be customized)		
灌装头数/Filling nozzle number	4	6	8
速度/Speed	45-60 cups/min	70-90 cups/min	100-120 cups/min
灌装量/Filling volume	5-300ml (可定制/ Can be customized)		
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)		
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)		
工作气压/Working air pressure	0.6-0.8 Mpa	0.6-0.8 Mpa	0.6-0.8 Mpa
功率/Power	3.0 KW	4.0 KW	5.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈500kg	≈600kg	≈800kg
外形尺寸/Overall dimension	About L2800 × W1100 × H1800mm	About L2800 × W1300 × H1800mm	About L2800 × W1500 × H1800mm

YB–FG130B

全自动封罐机 Automatic Can Sealing Machine



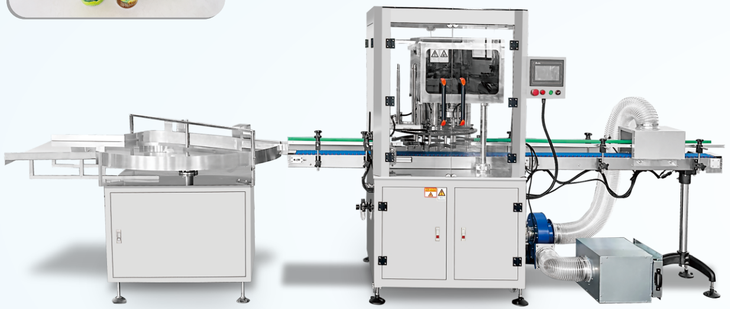

用途 Application :

本机适用于各种圆形马口铁罐、铝合金罐、塑料罐、纸罐等易拉罐的封口。

This machine is suitable for sealing various round tin cans, aluminum alloy cans, plastic cans, paper cans and other zip-top cans.

性能特点 Performance feature:

1.工作流程：供罐(选配)→充氮气(选配)→落盖→封口→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用4把滚刀封口，封口受力更均匀，性能指标能达到国际标准。
4.滚轮为台湾进口滚轮，材料为SKD31日本模具钢，采用正反面设计，寿命超过500万次封口。
5.具有无盖不封罐以及故障检测停机功能，有效减少设备故障。
6.下盖器一次可加盖200个（一筒）。
7.改变罐子高度，不需更换配件，采用手摇丝杆设计，调整高度时间约5-10分钟。
8.不良率极低，铁罐低于万分之一，塑料罐低于千分之一，纸罐低于千分之二。
9.压头采用铬12钼钒淬火处理，硬度超过50度，使用寿命超过100万罐。
10.主要电器均采用国外知名品牌。
11.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: feeding can (optional)→filling nitrogen (optional) →dropping cap→sealing→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Using 4 roller cutters for sealing, the sealing force is more uniform, and the performance indicators can meet international standards.
4.The roller that made of SKD 31 Japanese mold steel is imported from Taiwan. It adopts a front and back design and has a lifespan of over 5 million sealing cycles.
5.It has the functions of no lid no sealing, fault detection and shutdown, which reduce equipment failures effectively.
6.The cover loader can load up to 200 pieces (one tube) at a time.
7.No need to replace parts when change height of can, adopts hand cranked screw design, it takes about 5-10 minutes to adjust the height.
8.The defective rate is extremely low, with iron cans below one ten-thousandths, plastic cans below one thousandth, and paper cans below two thousandths.
9.The indenter adopts Cr12MoV quenching treatment, with a hardness exceeding 50 degrees and a service life exceeding one million cans.
10.Main electrical components adopt foreign well-known brands.
11.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-FG130B
罐子尺寸/Can size	Φ: 40-130mm, H: 60-220mm
速度/Speed	10-40 cans/min
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈400kg
外形尺寸/Overall dimension	About L2000 × W900 × H1650mm

YB–FK2/FK4

广口瓶铝箔封口机 Aluminum Foil Sealing Machine for Wide Mouth Bottle





用途 Application :

本机适用于圆形、方形塑料广口瓶或桶类等产品的封口包装。

This machine is suitable for sealing and packaging products such as round and square plastic wide mouth bottles or barrels.

性能特点 Performance feature:

1.工作流程：进瓶→放片膜/卷膜→热压封口→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.具有封口美观牢固、操作简单、维护方便等特点。
4.具有防潮、防漏、延长产品保质期以及防盗防伪的作用。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the bottle→adding film→hot press sealing→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.It has the characteristics of beautiful and firm sealing, simple operation, and convenient maintenance.
4.It has the functions of moisture-proof, leak proof, extending product' s shelf life, anti-theft and anti-counterfeiting.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-FK2	YB-FK4
封口工位数/Sealing work station	2	4
速度/Speed	9-12 bottles/min	18-25 bottles/min
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.0 KW	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz	
净重/Net weight	≈300kg	≈380kg
外形尺寸/Overall dimension	About L2000 × W1000 × H1750mm	About L2400 × W1200 × H1750mm

YB–LF70

全自动铝箔封口机 Automatic Aluminum Foil Sealing Machine









技术参数/Technical parameter:

型号/Model	YB-LF70
封口直径/Sealing diameter	Φ: 20-70mm (可定制Can be customize)
速度/Speed	10-180 bottles/min
CMOS器件最大承受电流/ Maximum withstand current of CMOS device	37A
合格率/Pass rate	⩾ 99.9 % (取决于包材质量/Depends on quality of packing material)
振荡功率/Oscillation power	4.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈60kg
外形尺寸/Overall dimension	About L650 × W500 × H1200mm

用途 Application :

本机适用于各种塑料瓶的铝箔封口，广泛应用于药品、食品、化妆品、日用品、化工品等行业。

This machine is suitable for aluminum foil sealing of various plastic bottles and is widely used in industries such as pharmaceuticals, food, cosmetics, daily necessities, and chemicals, etc.

性能特点 Performance feature:

1.利用电磁感应原理，高频信号经放大后由感应线圈输出，当复合铝箔面与瓶口紧密地结合时，达到封口的目的。
2.配备超大散热器内循环水冷却系统。
3.平板式加热感应头，满足客户一定范围内多品种瓶盖的封口要求。
4.封口完好率百分之百，具有密封以及防盗防伪的作用。
5.机器外壳由优质304不锈钢材质制成，符合GMP要求。

1.Using the principle of electromagnetic induction, high-frequency signals are amplified and output by induction coils. When the composite aluminum foil surface is tightly combined with the bottle mouth, the purpose of sealing is achieved.
2.Equipped with a super large radiator for internal circulating water cooling system.
3.The flat heating induction head meets the sealing requirements of customers for various types of bottle caps within a certain range.
4.The sealing integrity rate is 100%, it has the function of sealing, anti-theft and anti-counterfeiting.
5.Machine frame is made of high-quality 304 stainless steel material, meets GMP standard.

YB–QW1/QW2

全自动气雾剂灌装轧盖机 Automatic Aerosol Filling and Crimping Machine



性能特点 Performance feature:

1.工作流程：进罐→灌装→上阀→抓口→充气→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.蠕动泵/活塞泵计量，灌装精度高、速度快。
4.设备占地面积小，操作简单，维护方便。
5.灌液结构采用的是316L不锈钢和聚四氟密封件，具备腐蚀性液体的灌装要求。
6.主要电器均采用国外知名品牌。
7.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the can→filling→adding valve→grab mouth→gas inflating→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Peristaltic pump/piston pump measuring, high filling accuracy and fast speed.
4.Machine has a small footprint, simple operation, and convenient maintenance.
5.The filling structure adopts 316L stainless steel and PTFE sealing components, which meet the filling requirements for corrosive liquids.
6.Main electrical components adopt foreign well-known brands.
7.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-QW1	YB-QW2
灌装头数/Filling nozzle number	1	2
加阀工位数/Adding valve work station	1	1
封口工位数/Sealing work station	1	1
充气工位数/Filling gas work station	1	1
罐子尺寸/Can size	Φ: 35-65mm, H: 70-330mm	
液体灌装量/Filling volume for liquid	20-500ml	20-500ml
气体灌装量/Filling volume for gas	20-500ml	20-500ml
速度/Speed	5-10 cans/min	10-20 cans/min
灌装误差/Filling error	⩽ ±1% (根据物料而定/Depends on product)	
合格率/Pass rate	⩾ 99% (取决于包材质量/Depends on quality of packing material)	
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.0 KW	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz	
净重/Net weight	≈500kg	≈600kg
外形尺寸/Overall dimension	About L2200 × W1900 × H2000mm	About L2600 × W1900 × H2000mm

用途 Application :

本机主要应用于防晒喷雾、雪花喷雾、空气清新剂、杀虫剂、自喷漆、除锈剂等产品的灌装封口。

This machine is mainly used for filling and sealing for sunscreen spray, snowflake spray, air freshener, insecticide, self spray paint, rust remover and other products.

YB–FW35

全自动灌装封尾机 Automatic Tube Filling and Sealing Machine



用途 Application :

本机主要用于各类护肤品、化妆品、面霜、牙膏等软管的灌装封口。

This machine is mainly used for filling and sealing soft tubes of various skin care products, cosmetics, face cream, toothpaste, etc.

性能特点 Performance feature:

1.工作流程：自动下管→对标→灌装→软管内部加热→软管外部加热→封口及钢印打码(选配)→切圆角/直角→出管。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.采用伺服电机控制活塞泵计量方式，精度高、速度快。
4.无管不灌装，封口平整、美观。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: automatic tube feeding→benchmarking→filling→heating tube inside→heating tube outside→sealing and stamping (optional)→cutting rounded corners/right angles→output tube.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Servo motor controls piston pump measuring, with high filling accuracy and fast speed.
4.No tube no filling, smooth and beautiful sealing.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.




技术参数/Technical parameter:

型号/Model	YB-FW35
灌装头数/Filling nozzle number	1
封口工位数/Sealing work station	1
管子尺寸/Tube size	Φ: 10-50mm, H: 20-250mm (可定制/Can be customized)
灌装量/Filling volume	30-200ml (可定制/Can be customized)
速度/Speed	20-35 tubes/min
灌装误差/Filling error	≤ ±1% (根据物料而定/Depends on product)
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	4.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈600kg
外形尺寸/Overall dimension	About L2200 × W1000 × H1800mm

水处理设备

Water Treatment Equipment



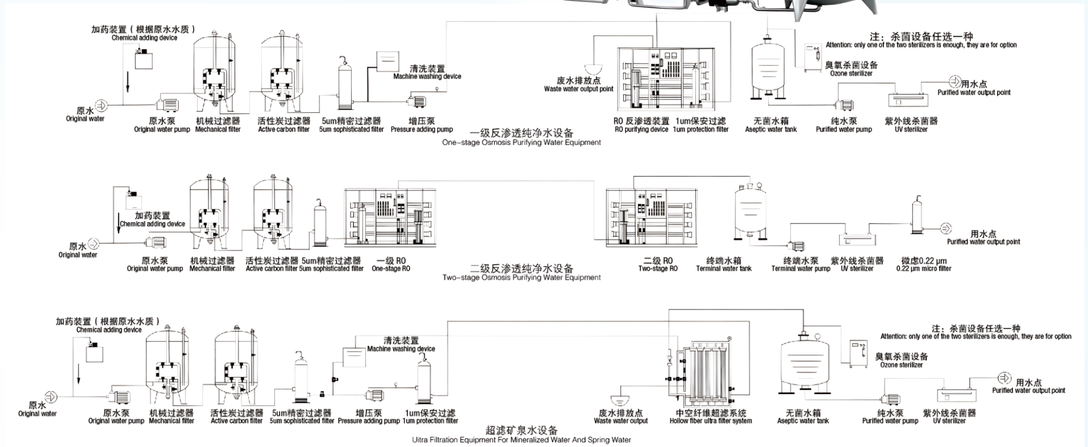




3m³/h 双级反渗透
3m³/h two-stage reverse osmosis



15m³/h 双级反渗透
15m³/h two-stage reverse osmosis



15m³/h 双级反渗透
15m³/h two-stage reverse osmosis

Washing Filling Capping Machine 3–in–1

冲洗、灌装、封口三合一机

使用范围 Using range：

- 物 料:矿泉水、纯净水，果味水
- 容量:330-4000ml
- 生产能力:3000-30000瓶/小时(500ml)
- 灌装方式:重力灌装/负压灌装
- 灌装温度:常温

- Products: Mineral water, purified water, fruit water
- Volume: 330-4000ml
- Production capacity: 3000-30000 BPH(500ml)
- Filling manner: Gravity filling / Negative pressure filling
- Filling temperature: Normal temperature





技术参数/Technical parameter:

型号/Model	YB-CGF14-12-5	YB-CGF18-18-6	YB-CGF24-24-8	YB-CGF32-32-8	YB-CGF40-40-10	YB-CGF50-50-15
冲瓶头数/Number of rinsing head	14	18	24	32	40	50
灌装头数/Number of filling head	12	18	24	32	40	50
旋盖头数/Number of capping head	5	6	8	8	10	15
额定产量/Rated production capacity(500ml)	≤83 bottles/min	≤133 bottles/min	≤200 bottles/min	≤233 bottles/min	≤300 bottles/min	≤400 bottles/min
功 率/Power	3.5 KW	4 KW	4.8 KW	7.6 KW	8.3 KW	9.6 KW
外形尺寸/Overall dimension	About L2400xW1700xH2300mm	About L2400xW1850xH2300mm	About L2780xW2070xH2300mm	About L3330xW2560xH2300mm	About L4550xW2650xH2300mm	About L5450xW3210xH2300mm

Washing Hot Filling Capping Machine 3–in–1 (PET Bottle)

冲洗、热灌装、封口三合一机(PET瓶)

使用范围 Using range：

- 物 料:果汁、茶饮料、功能饮料等
- 容 量:330-4000ml
- 生产能力:3000-36000瓶/小时(500ml)
- 瓶口规格:28/ 38mm
- 灌装方式:压力灌装
- 灌装温度:85-90度

- Products: Fruit juice, tea drinks, energy drinks, etc.
- Volume:330-4000ml
- Production capacity: 3000-36000 BPH(500ml)
- Dia. of bottle neck:28/38mm
- Filling manner:Pressure filling
- Filling temperature:85-90°C





技术参数/Technical parameter:

型号/Model	YB-RCGF8-8-3	YB-RCGF16-12-6	YB-RCGF18-18-6	YB-RCGF24-24-8	YB-RCGF32-32-10	YB-RCGF40-40-12	YB-RCGF50-50-15
冲瓶头数/Number of rinsing head	8	16	18	24	32	40	50
灌装头数/Number of filling head	8	12	18	24	32	40	50
旋盖头数/Number of capping head	3	6	6	8	10	12	15
额定产量/Rated production capacity (500ml)	≤50 bottles/min	≤66 bottles/min	≤100 bottles/min	≤166 bottles/min	≤200 bottles/min	≤250 bottles/min	≤333 bottles/min
功率 /Power	3 KW	3.5 KW	4 KW	4.8 KW	7.6 KW	8.3 KW	9.6 KW
外形尺寸/Overall dimension	About L1900xW1420 xH2000mm	About L2200xW1600 xH2300mm	About L2450xW1900 xH2300mm	About L2750xW2180 xH2300mm	About L4000xW2300 xH2300mm	About L4550xW2650 xH2300mm	About L5450xW3210 xH2300mm


Washing Carbonated Filling Capping Machine 3–in–1 (PET Bottle)

冲洗、汽水灌装、封口三合一机(PET瓶)

使用范围 Using range：

- 物 料:含气饮料
- 容 量:330-4000ml
- 生产能力:3000-36000瓶/小时(500ml)
- 瓶口规格:28/ 38mm
- 灌装方式:等压灌装
- 灌装温度:0-5度

- Product: Carbonated soft drink
- Volume: 330-4000ml
- Production capacity: 3000-36000 BPH(500ml)
- Dia. of bottle neck: 28/ 38mm
- Filling method: Counter-pressure filling
- Filling temperature: 0-5°C

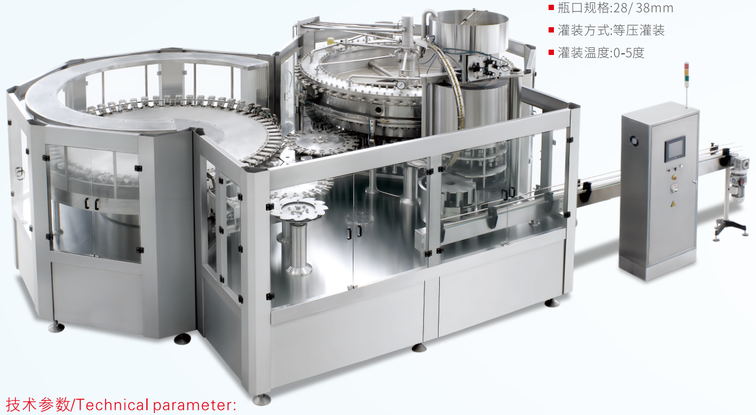





技术参数/Technical parameter:

型号/Model	YB-DCGF16-12-6	YB-DCGF18-18-6	YB-DCGF24-24-8	YB-DCGF32-32-8	YB-DCGF40-40-12	YB-DCGF50-50-12	YB-DCGF60-60-15	YB-DCGF80-80-20
冲洗/灌装/旋盖头数/Rinsing/filling/capping heads	16-12-6	18-18-16	24-24-8	32-32-8	40-40-12	50-50-12	60-60-15	80-80-20
瓶子尺寸/Bottle size	Φ50-97mm H:300mm	Φ50-97mm H:300mm	Φ50-105mm H:160-320mm	Φ50-105mm H:160-320mm	Φ50-105mm H:160-320mm	Φ50-105mm H:160-320mm	Φ50-105mm H:160-320mm	Φ50-105mm H:160-320mm
生产能力/Production capacity	≤30-65 bottles/min	≤65-100 bottles/min	≤130-165 bottles/min	≤165-210 bottles/min	≤210-250 bottles/min	≤270-335 bottles/min	≤335-400 bottles/min	≤435-535 bottles/min
灌装温度/Filling temperature	0-5°C	0-5°C	0-5°C	0-5°C	0-5°C	0-5°C	0-5°C	0-5°C
灌装压力/Filling pressure	0.15-0.35Mpa	0.15-0.35Mpa	0.15-0.35Mpa	0.2-0.4Mpa	0.2-0.4Mpa	0.2-0.4Mpa	0.2-0.4Mpa	0.2-0.4Mpa
电机功率/Motor Power	2.87 KW	2.93 KW	3.73 KW	6.85 KW	7.5 KW	11 KW	15 KW	19 KW
外形尺寸/Overall dimension	About L2300xW1600 xH2500mm	About L2600xW1920 xH2550mm	About L3100xW2200 xH2800mm	About L3850xW3000 xH2850mm	About L4850xW3800 xH2750mm	About L5750xW3550 xH2750mm	About L6500xW5500 xH2750mm	About L76800xW6640 xH2650mm
重 量/Weight	≈2800 kg	≈3650 kg	≈4800 kg	≈6800 kg	≈8650 kg	≈10500kg	≈12800 kg	≈15000 kg

Washing Hot Filling Capping Machine 3–in–1(Glass Bottle)

冲洗、热灌装、封口三合一机(玻璃瓶)

使用范围 Using range：

- 物 料:果汁、咖啡饮料、蛋白饮料等
- 容 量:100-1000ml
- 生产能力:5000-36000瓶/小时(500ml)
- 灌装方式:压力灌装
- 灌装温度:85-90度

- Products: Fruit juices, coffee drinks, protein drinks, etc.
- Volume:100-1000ml
- Production capacity: 5000-36000 BPH(500ml)
- Filling method: Pressure filling
- Filling temperature: 85-90°C







三旋盖/四旋盖
Three / Four Screw Cap



铝旋盖
Aluminum Screw Cap



皇冠盖
Crown Cap

Non–carbonated Can Filling and Packing Production Line For Juice, Tea Beverage,Protein Beverage

不含气果汁、茶饮料、蛋白饮料易拉罐灌装包装生产线









使用范围 Using range：

- 物 料:果汁、咖啡饮料、蛋白饮料
- 容 量:150-500ml
- 生产能力:9000-30000罐/小时
- 罐 型:200/ 202/ 206/ 209
- 灌装方式:重力灌装
- 灌装温度:85-90度

- Products: Fruit juices, coffee drinks, protein drinks
- Volume: 150-500ml
- Production capacity: 9000-30000 cans/h
- Can type: 200 /202 /206 /209
- Filing method: Gravity filling
- Filling temperature:85-90°C

Washing Carbonated Filling Capping Machine 3–in–1 (Glass Bottle)

冲洗、汽水灌装、封口三合一机(玻璃瓶)





使用范围 Using range：

- 物 料:含气饮料
- 容 量:100-1000ml
- 生产能力:5000-36000瓶/小时(500ml)
- 灌装方式:等压灌装
- 灌装温度:0-4度

- Product: Carbonated soft drink
- Volume: 100-1000ml
- Production capacity: 5000-36000 BPH(500ml)
- Filling method: Counter-pressure filling
- Filling temperature: 0-4°C



皇冠盖 Crown Cap



铝旋盖 Aluminum Screw Cap



铝旋盖 Aluminum Screw Cap

HYGZ Series Carbona Soft Drinks Cans Filling and Sealing Machine

HYGZ 系列易拉罐含气饮料灌装封口一体机








使用范围 Using range：

- 物 料:含气饮料
- 容 量:150-500ml
- 生产能力:9000-30000罐/小时
- 罐型:200/ 202 /206/ 209
- 灌装方式:等压灌装
- 灌装温度:0-4度
- Product: Carbonated soft drink
- Volume: 150-500ml
- Production capacity: 9000-30000 cans/h
- Can type: 200/ 202 /206 /209
- Filling method: Counter-pressure filling
- Filling temperature: 0-4°C

YB–LT80

全自动立式贴标机 Automatic Vertical Labeling Machine

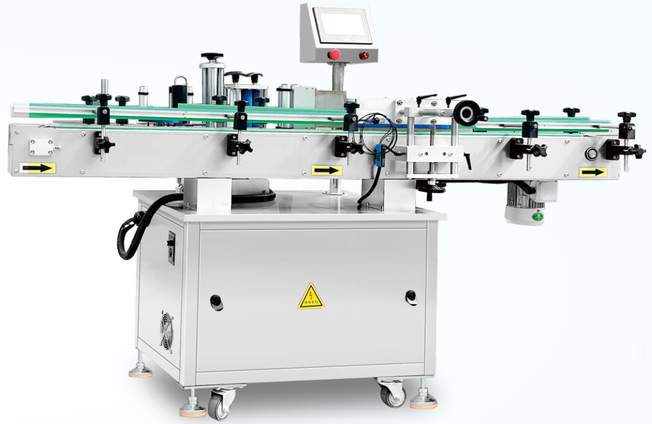





用途 Application：

本机主要用于各种圆瓶、锥型圆瓶、方瓶、扁瓶的贴标。

This machine is mainly used for labeling various round bottles, conical round bottles, square bottles and flat bottles.

性能特点 Performance feature：

1.工作流程：进瓶→检瓶→出标→履带贴标/夹轮定位贴标(选配)→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.出标机构采用伺服电机控制，速度快、精度高。
4.适用标签材质为不干胶标签。
5.贴标头上下左右均可调节。
6.可以安装色带打码/喷码机(选配)。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the bottle→detecting bottle→output label→track labeling /clamp wheel positioning label (optional)→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The output label mechanism adopts servo motor control, with fast speed and high accuracy.
4.The applicable label material is self-adhesive label.
5.Adjustable labeling head can be adjusted up, down, left, right.
6.Can be equipped with ribbon coding/inkjet printer (optional).
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-LT80
瓶子尺寸/Bottle size	Φ: 20-120mm, H: 50-200mm (可定制/Can be customized)
标签尺寸/Label size	L: 10-350mm, H: 10-150mm
速度/Speed	30-80 bottles/min
贴标精度/Label accuracy	≤ ±1mm (取决于包材质量/Depends on quality of packing material)
纸卷内径/Label roll inner diameter	76mm
标卷外径/Label roll outer diameter	≤ 300mm
功率/Power	1.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈200kg
外形尺寸/Overall dimension	About L2200 × W1400 × H1350mm

YB–WT200

全自动卧式贴标机 Automatic Horizontal Labeling Machine







用途 Application :

本机主要用于直管类瓶子和物品的贴标，如口服液、试剂管、卡式瓶、固体胶、睫毛膏、唇膏等产品的贴标。

This machine is widely used for labeling cylindrical type bottles or objects, such as oral liquid bottles, reagent tubes, cartridges, solid gel, mascara, lipstick, etc.

性能特点 Performance feature:

1.工作流程：自动下管(选配)→输送→检瓶→出标→履带贴标→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.应用柔性分瓶技术，分瓶贴标顺畅、破瓶率低。
4.采用侧卧式滚筒输送机构，输送链倾斜，瓶子自动导正，输送贴标稳定。
5.出标机构采用伺服电机控制，速度快、精度高。
6.适用标签材质为不干胶标签。
7.自动光电追踪系统，具备无产品不贴标功能，防止漏贴和标签浪费。
8.可以安装色带打码/喷码机(选配)。
9.主要电器均采用国外知名品牌。
10.机器外壳由优质304不锈钢材料制成，符合GMP标准。


技术参数/Technical parameter:

型号/Model	YB-WT200
瓶子尺寸/Bottle size	Φ: 10-30mm, H: 50-150mm (可定制/Can be customized)
标签尺寸/Label size	L: 20-100mm, H: 20-130mm
速度/Speed	30-200 bottles/min
贴标精度/Label accuracy	⩽ ±1mm (取决于包材质量/Depends on quality of packing material)
纸卷内径/Label roll inner diameter	76mm
标卷外径/Label roll outer diameter	⩽ 300mm
功率/Power	1.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈250kg
外形尺寸/Overall dimension	About L1800 × W900 × H1450mm

1.Workflow: automatic bottle dropping (optional)→conveying→detecting bottle→output label→track labeling→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The application of flexible bottle separation technology ensures smooth labeling and low bottle breakage rate.
4.Adopts lateral recumbent roller conveyor mechanism, the conveying chain is inclined, then the bottle is automatically guided, and the conveying and labeling are stable.
5.The output label mechanism adopts servo motor control, with fast speed and high accuracy.
6.The applicable label material is self-adhesive label.
7.Automatic photoelectric tracking system, has function of no product no labeling, so that prevent missing label or wasting label.
8.Can equipped with ribbon coding/inkjet printer (optional).
9.Main electrical components adopt foreign well-known brands.
10.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–PT120

全自动平面贴标机 Automatic Flat Labeling Machine

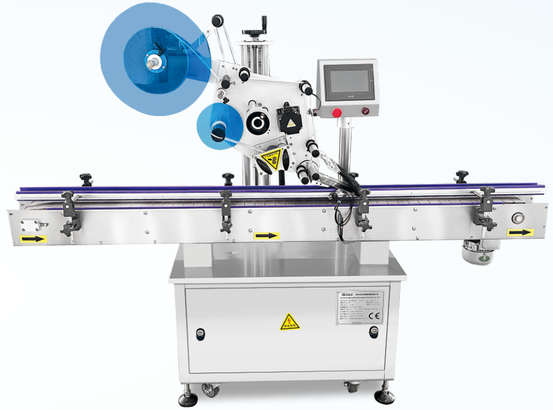



用途 Application :

本机主要用于各种物品的平面贴标，如书本、文件夹、盒子、袋子、纸箱、瓶子、盖子等。

This machine is mainly used for flat labeling of various objects, such as book, folders, boxes, bags,bottles, caps, etc.

性能特点 Performance feature:

1.工作流程：产品输送→检测产品→出标→贴标→输出产品。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.出标机构采用伺服电机控制，速度快、精度高。
4.适用标签材质为不干胶标签。
5.贴标头上下左右均可调节。
6.可以安装色带打码/喷码机(选配)。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。


技术参数/Technical parameter:

型号/Model	YB-PT120
产品尺寸/Product size	L: 20-400mm, W: 20-200mm, H: 10-200mm
标签尺寸/Label size	L: 20-150mm, W: 20-130mm
速度/Speed	50-120 bottles/min
贴标精度/Label accuracy	⩽ ±1mm (取决于包材质量/Depends on quality of packing material)
纸卷内径/Label roll inner diameter	76mm
标卷外径/Label roll outer diameter	⩽ 300mm
功率/Power	1.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈200kg
外形尺寸/Overall dimension	About L1800 × W900 × H1450mm

1.Workflow: conveying product→detecting product→output label →labeling→output product.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The output label mechanism adopts servo motor control, with fast speed and high accuracy.
4.The applicable label material is self-adhesive label.
5.Adjustable labeling head can be adjusted up, down, left, right.
6.Can be equipped with ribbon coding/inkjet printer (optional).
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

YB–ST60

全自动双面贴标机 Automatic Double Sides Labeling Machine

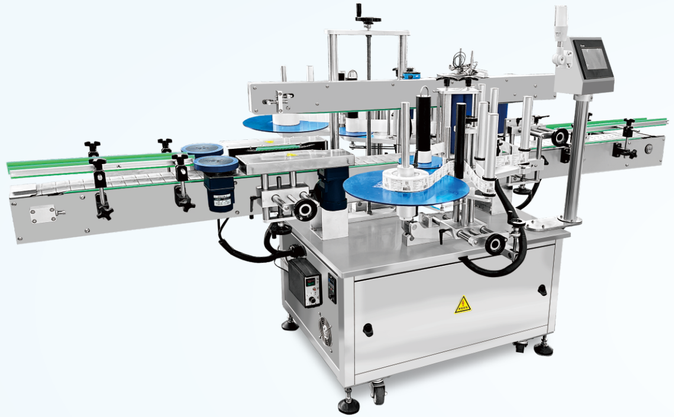



用途 Application :

本机主要用于各种瓶型的单面或双面贴标，如扁瓶、方瓶、圆瓶、异形瓶等。

This machine is mainly used for single side or double sides labeling of various shaped bottles, such as flat bottles, square bottles, round bottles, irregular shape bottles, etc.

性能特点 Performance feature：

1.工作流程：进瓶→压瓶输送→检瓶→出标→毛刷扶标→履带贴标(选配)→输出产品。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.出标机构采用伺服电机控制，速度快、精度高。
4.适用标签材质为不干胶标签。
5.贴标头上下左右均可调节。
6.可以安装色带打码/喷码机(选配)。
7.主要电器均采用国外知名品牌。
8.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the bottle→pressing bottle and conveying→detecting bottle→output label→brush labeling→track labeling (optional)→output product.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The output label mechanism adopts servo motor control, with fast speed and high accuracy.
4.The applicable label material is self-adhesive label.
5.Adjustable labeling head can be adjusted up, down, left, right.
6.Can be equipped with ribbon coding/inkjet printer (optional).
7.Main electrical components adopt foreign well-known brands.
8.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-ST60
瓶子尺寸/Bottle size	L: 40-300mm, W: 30-180mm
标签尺寸/Label size	L: 20-250mm, H: 10-150mm
速度/Speed	20-60 bottles/min
贴标精度/Label accuracy	≤ ±1mm (取决于包材质量/Depends on quality of packing material)
纸卷内径/Label roll inner diameter	76mm
标卷外径/Label roll outer diameter	≤ 300mm
功率/Power	3.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈380kg
外形尺寸/Overall dimension	About L2800 × W1800 × H1550mm

YB–TB200

全自动套标机 Automatic Shrink Sleeve Labeling Machine



性能特点 Performance feature：

1. 工作流程：进瓶→螺杆装置分瓶→标签分切→套标→标签定位→标签收缩(可选配蒸汽式或电加热式收缩炉)→成品输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.高性能伺服电机控制送标，位置准确、不漏标、不卡标。
4.定位式中心导柱，使标签输送更加稳定。
5.整机具有故障自动侦测、报警功能。
6.主要电器均采用国外知名品牌。
7.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: entering the bottle→screw device to split bottle→label cutting→sleeve labeling→label positioning→label shrinkage (optional with steam or electric heating shrinkage furnace)→output finished product .
2.PLC control, color touch screen display, machine has function of counting automatically.
3.High performance servo motor control for label delivery, with accurate position, no missing or stuck labels.
4.Positioned central column makes label conveying more stable.
5.Machine has function of automatic fault detection and alarm.
6.Main electrical components adopt foreign well-known brands.
7.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

用途 Application :

本机广泛应用于食品、饮料及制药行业，如果汁、牛奶、食用油、酱油、醋、调味品、精油、面霜、滴眼液、注射剂等。

This machine is widely used in food, beverage and pharmaceutical industries, such as juice, milk, edible oil, soy sauce, vinegar, condiments, essential oil, face cream, eye drops, injections, etc.

套标主机技术参数/ Shrink applicator technical parameter:


型号/Model	YB-TB200
标签长度/Label length	30-300mm
标签厚度/Label thickness	0.03-0.06mm
速度/Speed	30-200 bottles/min
纸管内径/Paper corn inner diameter	76mm
合格率/Pass rate	≥ 99% (取决于包材质量/ Depends on quality of packing material)
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈350kg
外形尺寸/Overall dimension	About L1800 × W900 × H2100mm

收缩炉技术参数/Shrinkage furnace technical parameter:

型号/Model	YB-LZ1800	
加热类型/Heating type	蒸汽式/Steam type	电加热式/Electric heat type
炉子长度/Furnace length	L: 1500-1800mm	
输送速度/Conveying speed	0-35m/min	
蒸汽用量/Steam consumption	18kg/hour	0
功率/Power	26-40 KW (可定制/Can be customized)	24 KW (可定制/Can be customized)
电源/Power supply	1Ph. 220V or 3Ph. 380V, 50/60Hz	
净重/Net weight	≈180kg	
外形尺寸/Overall dimension	About L3000 × W600 × H1600mm	

YB–WZ80/WZ100

全自动装盒机 Automatic Cartoning Machine

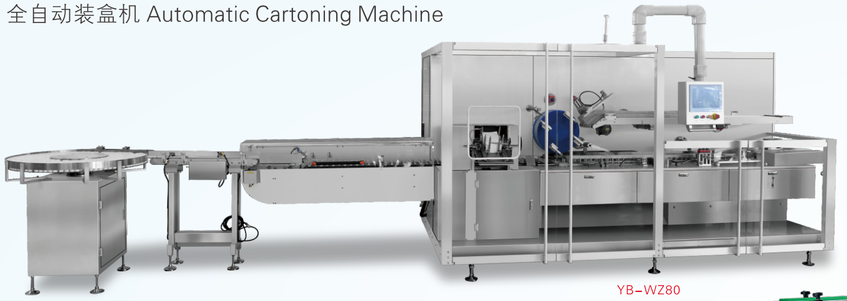

YB–WZ80





YB–WZ100

性能特点 Performance feature:

1.工作流程：输送带进瓶→折叠说明书(选配)→吸盒→开盒→推送说明书和瓶子入盒→喷胶(选配)→封盒→成品输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.同一台设备可适用于多种规格产品的包装，调节简单。
4.可选配压印/打印生产日期或批号。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。

1.Workflow: conveyor belt feeding bottle →folding instruction manual (optional)→sucking box→opening box→pushing instruction manual and bottle into box→glue spraying (optional)→sealing box→output finished product .
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The same machine can be used for packaging multiple specifications of products, easy to adjust.
4.Optional embossing/printing of production date or batch number.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

用途 Application :

本机广泛应用于药品、化妆品、面膜、食品、五金等产品的全自动装盒。

This machine is widely used for automatic cartoning pharmaceutical, cosmetics, facial mask, food, hardware and other products.

技术参数/Technical parameter:

型号/Model	YB-WZ80	YB-WZ100
纸盒规格/Carton specification	L: 60-240mm, W: 30-170mm, H: 20-70mm	L: 60-230mm, W: 30-130mm, H: 20-55mm
纸盒纸质/Carton paper	250-300g (白卡/white card) or 300-350g (灰卡/gray card)	
速度/Speed	30-80 cartons/min	30-100 cartons/min
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)	
耗气量/Gas consumption	5-30L/min	5-30L/min
工作气压/Working air pressure	0.6-0.8Mpa	0.6-0.8Mpa
功率/Power	2.5 KW	2.5 KW
电源/Power supply	1Ph. 220V, 50/60Hz	1Ph. 220V, 50/60Hz
净重/Net weight	≈1200kg	≈900kg
外形尺寸/Overall Dimension	About L4500 × W1100 × H1700mm	About L2600 × W1100 × H1500mm

YB–LZ50

旋转式装盒机 Rotary Type Cartoning Machine





用途 Application :

本机广泛应用于药品、化妆品、面膜、食品、五金等产品的全自动装盒。

This machine is widely used for automatic cartoning pharmaceutical, cosmetics, facial mask, food, hardware and other products.

性能特点 Performance feature:

1.工作流程：供瓶/理瓶(选配)→自动打开预制盒→手动/自动将产品填充到盒子中→喷胶(选配)→自动封盒→成品输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.立式旋转刀架设计：操作简单，易于清洗。
4.可选配压印/打印生产日期或批号。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。


1.Workflow: feeding/sorting bottles (optional)→opening prefabricated box automatically→manually/automatically fill the product into the box→spray glue (optional)→sealing box automatically→output the finished product.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Vertical rotating knife holder design: easy to operate and clean.
4.Optional embossing/printing of production date or batch number.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-LZ50
纸盒规格/Carton specification	L: 60-200mm, W: 20-80mm, H: 20-100mm
纸盒纸质/Carton paper	250-300g (白卡/white card) or 300-350g (灰卡/gray card)
速度/Speed	20-50 cartons/min
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)
耗气量/Gas consumption	150L/min
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	2.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈500kg
外形尺寸/Overall Dimension	About L1300 × W1500 × H1900mm

YB–SW400

全自动三维包装机 Automatic Cellophane Film Wrapping Machine

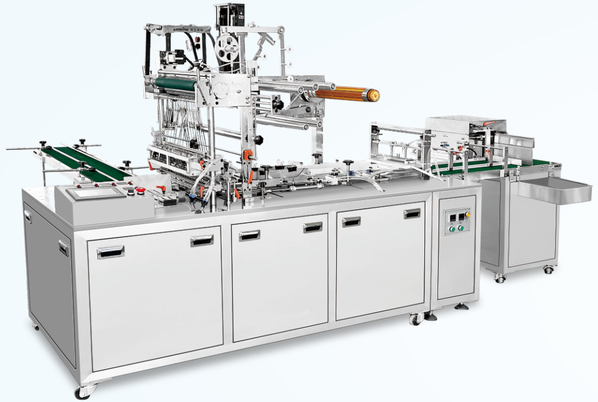



用途 Application :

本机广泛应用于药品、食品、保健品、化妆品、日用品、文具用品、扑克牌等行业中各种盒式物品的全自动密封包装。

This machine is widely used for fully automatic sealing and packaging of various boxed items in industries such as pharmaceuticals, food, health products, cosmetics, daily necessities, stationery supplies, and poker.

性能特点 Performance feature:

1.工作流程：推盒→加金属防伪线→送膜→包裹→切割封合→自然折角→两端封口→上下整形→左右整形→六面烫（选配）→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.经本机包装的产品具有防伪、防潮、防尘的效果，提高产品档次。
4.同一台设备可适用于多种规格产品的包装，调节简单。
5.主要电器均采用国外知名品牌。
6.机器外壳由优质304不锈钢材料制成，符合GMP标准。


1.Workflow: pushing box→adding metal anti-counterfeiting line →film delivery→wrapping→cutting and sealing →folding angle →sealing at both ends →up-down shaping→left and right shaping→six sides heating(optional) →output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Products packaged by this machine have anti-counterfeiting, moisture-proof, and dust-proofeffects, improving product lever.
4.The same machine can be used for packaging multiple specifications of products, easy to adjust.
5.Main electrical components adopt foreign well-known brands.
6.Machine frame is made of high quality 304 stainless steel, meets GMP standard.

技术参数/Technical parameter:

型号/Model	YB-SW400
产品尺寸/Product size	L: 100-400mm, W: 50-200mm, H: 20-100mm
包装材料/Packing material	OPP/BOPP/PVC
速度/Speed	10-30 cartons/min
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	5.0 KW
电源/Power supply	3Ph. 380V, 50/60Hz
净重/Net weight	≈1000kg
输送架尺寸/Conveyor frame size	About L1600 × W500 × H850mm
主机尺寸/Main machine dimension	About L2350 × W1100 × H1550mm

YB–FS800

全自动封切收缩机 Automatic Sealing and Cutting Shrinkage Machine

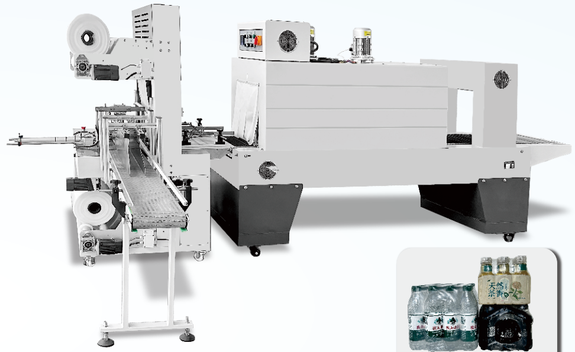

用途 Application :

本机主要用于啤酒、饮料、纯净水、果汁、果酱、乳制品、化妆品等产品的全自动收缩包装。

This machine is mainly used for fully automatic shrink packaging of beer, beverages, purified water, fruit juice, jam, dairy products, cosmetics and other products.

性能特点 Performance feature:

1.工作流程：进瓶→定量→推瓶→裹膜→封切→收缩→冷却定型→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.全自动袖口式收缩包装机是针对单个物体或无底托产品而设计，可做到6瓶、9瓶、12瓶、15瓶、18瓶、20瓶、24瓶等多种包装形式。
4.感应开关控制送膜系统，可靠调控送膜长度，减少损耗。
5.独特收缩通道，两套离心式热风循环系统，热量平衡均匀，收缩紧固、美观。
6.三层隔热处理，保温性能好，升温快，节约能源。
7.配备加强型冷却定型通道。
8.包装组合及瓶型改变时调整方便，可实现一机多用的功能。
9.主要电器均采用国外知名品牌。
10.机器外壳采用碳钢/喷塑材料制成。

1.Workflow: entering the bottle→quantitative measurement→pushing bottle→wrapping film→sealing and cutting→shrinking→cooling and shaping→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.The fully automatic cuff type shrink packaging machine is designed for individual objects or products without bottom support, it can be packaged in various forms such as 6 bottles, 9 bottles, 12 bottles, 15 bottles, 18 bottles, 20 bottles, 24 bottles, etc.
4.The induction switch controls the film delivery system, reliably regulating the length of the film delivery and reducing losses.
5.Unique contraction channel, two sets of centrifugal hot air circulation systems, evenly balanced heat, tight contraction, and beautiful appearance.
6.Three layers insulation treatment, good insulation performance, fast heating, and energy-saving.
7.Equipped with reinforced cooling and shaping channels.
8.It is convenient to adjust when change the packaging combination and bottle type, can achieve the function of one machine for multiple purposes.
9.Main electrical components adopt foreign well-known brands.
10.Machine frame is made of carbon steel/spray plastic material.

技术参数/Technical parameter:

型号/Model	YB-FS800
封口方式/Sealing method	袖口式/Cuff type
薄膜材质/Film material	PE
最大包装尺寸/Maximum packing size	L: 420mm, W: 320mm, H: 320mm
最大薄膜尺寸/Maximum film size	宽W: 800mm, 外径Outer diameter: 280mm
速度/Speed	10-15 packages/min
合格率/Pass rate	≥ 99% (取决于包材质量/Depends on quality of packing material)
工作气压/Working air pressure	0.6-0.8Mpa
功率/Power	21 KW
电源/Power supply	3Ph. 380V, 50/60Hz
热收缩机炉体尺寸/Heat shrink furnace body size	L: 1500mm, W: 600mm, H: 400mm
热收缩机输送速度/Heat shrink machine conveying speed	30m/min (可调Adjustable)
平台高度/Platform height	850-950mm
净重/Net weight	≈700kg
外形尺寸/Overall dimension	About L4500 × W2200 × H1600mm

YB–CD/FO/UR

全自动激光喷码机 Automatic Laser Marking Machine





用途 Application :

本机广泛应用于医药、化妆品、烟草、酒类、食品饮料、陶瓷建筑、皮革、电子元件等行业文字和图形的标记。

This machine is widely used for laser marking text and graphics in industries such as medicine, cosmetics, tobacco, alcohol, food and beverage, ceramic architecture, leather, electronic components, etc.

性能特点 Performance feature:

1.操作简便，无需耗材、无污染，运行成本低廉。
2.中英文操作界面，可支持多种标准和特殊字体，同时具有强大的图形编辑功能。
3.激光标刻是将物体表面的一层物质气化，所以标刻出来的字迹永久不可擦除，可起到一定的防伪防或串货的功能。

1.Easy to operate, no consumables required, no pollution, and low operating cost.
2.The Chinese and English operation interface, can support multiple standard and special fonts, and also has powerful graphic editing functions.
3.Laser marking is the process of vaporizing a layer of material on the surface of an object, so the engraved handwriting is permanently indelible and can play a certain role in anti-counterfeiting or anti-counterfeiting.

技术参数/Technical parameter:

型号/Model	YB-CD	YB-FO	YB-UR
类型/Type	二氧化碳/CO_2	光纤/Fiber optical	紫外线/Ultraviolet radiation
激光功率/Laser power	10/20/30/50/100W		3/5/10/25W
最小线宽/Minimum line width	0.04mm		≤0.005mm
重复定位精度/Repetitive positioning accuracy	±0.01mm		±0.01mm
冷却方式/Cooling method	风冷/Cooling by air		水冷/Cooling by water
标准雕刻范围/Standard engraving range	110x110mm		110x110mm
雕刻深度/Engraving depth	≤0.1mm		≤0.1mm
雕刻速度/Engraving speed	50-200字符characters/min		50-200字符characters/min
功率/Power	150 W		200 W
电源/Power supply	1Ph. 220V, 50/60Hz		1Ph. 220V, 50/60Hz

YB–PM17

全自动油墨喷码机 Automatic Inkjet Printer



用途 Application :

本机广泛应用于医药、食品饮料、化妆品、线缆、PVC、玻璃制品等行业产品的油墨喷印。

This machine is widely used for inkjet printing of products in different industries such as medicine, food and beverage, cosmetics, cables, PVC, glass products, etc.

性能特点 Performance feature:

1.采用10.4寸高清触摸屏，操作简单。
2.配备原装进口泵头，搭配自动清洗功能。
3.可喷印数字、字母、汉字以及简单的图形。
4.机器自身可以存储140条信息。
5.喷印的信息即喷即干。
6.本机具有一键清洗和自动清洗的功能。
7.可选配同步器、计米器、传送带、光纤感应器、分页机、USB转RS232线等。

1. Adopts 10.4-inch high-definition touch screen, easy to operate.
2. Equipped with original imported pump head and has function of automatic cleaning.
3. It can print numbers, letters, Chinese characters, and simple graphics.
4. Machine itself can store 140 pieces of information.
5. The printed information is dried immediately after printing.
6. Machine has one click cleaning and automatic cleaning functions.
7. Optional synchronizer, meter counter, conveyor belt, fiber optic sensor, paging machine, USB to RS232 cable, etc.

技术参数/Technical parameter:

型号/Model	YB-PM17
喷印字体高度/Print height	2-17mm
喷印行数/Print line	1-4 lines
喷印速度/Print speed	2m/s
喷印字体/Print font	5x5, 4x7, 7x5, 5x7, 7x9, 6x12, 8x16, 9x16, 10x16, 12x16, 11x24, 24x24 (特殊字体可定制/Can be customized for special font)
墨水类型/Ink type	酮基、醇基、水基/Ketone, alcohol, and water-based
墨水消耗量/Ink consumption	5000万字符50 million characters (5x5点阵dot)/L
干燥时间/Drying time	1s
功率/Power	150 W
电源/Power supply	1Ph. 220V, 50/60Hz
净重/Net weight	≈29kg
外形尺寸/Overall dimension	About L380 x W 280 x H 520mm

YB–DK500/DK650/TK430/TK500/FK430/FK500/FK650

全自动开箱机 Automatic Carton Erector



用途 Application：

本机适用于各种尺寸纸箱的全自动开箱。

This machine is mainly used for opening various types of boxes automatically.

性能特点 Performance feature：

1.工作流程：机械手取箱→开箱→底部折叠→底部封箱→输出。
2.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
3.开箱采用伺服电机驱动，保证纸箱方正。
4.结构简单，操作方便，易维护。
5.低噪音，使用过程平稳，不损坏纸箱。
6.采用倾斜式无动力箱库设计，随时补充纸箱，无需停机(选配)。
7.可与全后端设备实现无缝对接。
8.主要电器均采用国外知名品牌。
9.机器外壳采用碳钢/喷塑材料制成。

1.Workflow: mechanical arm picking up the box→opening the box→folding the bottom→sealing the bottom→output.
2.PLC control, color touch screen display, machine has function of counting automatically.
3.Adopts servo motor to open box, which ensure the box is square.
4.Simple structure, convenient to operate and easy to maintain.
5.Low noise, smooth operation, and does not damage the box.
6.Adopts design of inclined unpoweredbox storage, can replensh boxes at any time without shutting down machine (optional).
7.It can achieve seamless integration with all back-end devices.
8.Main electrical components adopt foreign well-known brands.
9.Machine frame is made of carbon steel/spray plastic material.

技术参数/Technical parameter:

型号/Model	YB-DK500	YB-DK650	YB-TK430	YB-TK500	YB-FK430	YB-FK500	YB-FK650
伺服数量/Servo quantity	2		3		5		
纸箱尺寸/Carton size	L: 280-500mm W: 150-400mm H: 150-400mm	L: 280-650mm W: 150-500mm H: 150-500mm	L: 180-430mm W: 80-350mm H: 105-350mm	L: 280-500mm W: 150-400mm H :150-400mm	L: 180-430mm W: 80-350mm H: 105-350mm	L: 280-500mm W: 150-400mm H: 150-400mm	L: 280-650mm W: 150-500mm H: 150-500mm
速度/Speed	5-15 cartons/min		5-25 cartons/min		5-30 cartons/min		5-25 cartons/min
胶带尺寸/Tape size	W: ⩽60mm		W: ⩽50mm		W: ⩽48mm		W: ⩽60mm
工作气压/Working air pressure	0.6-0.8Mpa		0.6-0.8Mpa		0.6-0.8Mpa		
功率/Power	1.0 KW		2.1 KW		3.0 KW		
电源/Power supply	1Ph. 220V, 50/60Hz		1Ph. 220V, 50/60Hz		1Ph. 220V, 50/60Hz		
净重/Net weight	≈350kg	≈550kg	≈550kg	≈620kg	≈450kg	≈620kg	≈900kg
外形尺寸/Overall dimension	About L2000 × W1900 × H1400mm	About L2300 × W2050 × H1550mm	About L2400 × W1900 × H1400mm	About L2600 × W2000 × H1400mm	About L2400 × W2000 × H1400mm	About L2600 × W2000 × H1400mm	About L2920 × W2100 × H1550mm

YB–ZXA/ZXB

全自动智能机械手装箱机 Automatic Intelligent Robotic Arm Packing Machine



用途 Application：

本机适用于饮料、食品、化妆品、化工、医药等行业的各种软硬袋装/瓶装产品的全自动装箱。

This machine is suitable for fully automatic box packaging of various soft and hard bagged/bottled products in industries such as beverages, food, cosmetics, chemicals, and pharmaceuticals.



性能特点 Performance feature：

1.PLC控制，彩色触摸屏显示，机器具有自动计数功能。
2.可定制抓取式/坐标式/并联蜘蛛手式装箱机。
3.自带配方存储功能，免编程换产。
4.码垛规格和纸箱规格尺寸变化时，可进行方便、准确调整。
5.装箱顺畅，不损伤纸箱外观。
6.特别适合流水线使用，移动方便，动作稳定。
7.本机根据驱动方式可制成电动装箱机、气动装箱机、伺服装箱机。
8.主要电器均采用国外知名品牌。
9.机器外壳采用碳钢/喷塑材料制成。

技术参数/Technical parameter:

型号/Model	YB-ZXA	YB-ZXB
工作方式/Working method	蜘蛛手/Spiderhand	抓取式/Grabbing type
纸箱尺寸/Carton size	L: 250-450mm, W: 160-400mm, H: 100-400mm	
速度/Speed	5-30 cartons/min (取决于纸箱尺寸/Depends on carton size)	4-12 cartons/min (取决于纸箱尺寸/Depends on carton size)
夹具种类/Fixture type	普通吸盘式、真空海绵式、定制型夹具式 Ordinary suction plate type, vacuum sponge type, customized fixture type	
有效负载/Payload	3-16kg (可定制/Can be customized)	
工作气压/Working air pressure	0.6-0.8Mpa	
功率/Power	3.0 KW	4.0 KW
电源/Power supply	1Ph. 220V, 50/60Hz	
净重/Net weight	≈500kg	≈800-1000kg
外形尺寸/Overall dimension	About L1600 × W1400 × H2100mm	可定制/Can be customized

1.PLC control, color touch screen display, machine has function of counting automatically.
2.Grabbing/coordinate/parallel spider hand box packing machine can be customized.
3.With formula storage function, no need to reset program when replace product.
4.When there are changes in the stacking specifications and box specifications, can adjust conveniently and accurately.
5.The packaging is smooth and does not damage the appearance of the box.
6.Especially suitable for assembly lines, it is easy to move and has stable movements.
7.This machine can be made into electric packing machines, pneumatic packing machines or servo packing machines according to the driving method.
8.Main electrical components adopt foreign well-known brands.
9.Machine frame is made of carbon steel/spray plastic material.

YB–MD16/MD20/MD25/MD30/MD40

协作码垛工作站 Collaborative Palletizing Workstation



用途 Application :

本机广泛应用于食品、医药、3C、日化、印刷等行业的产品码垛。

This machine is widely used for stacking products in industries such as food, medicine, 3C, daily chemical, and printing.



性能特点 Performance feature:

1.安全稳定：工业级力控传感器，具有高度的可靠性和安全性；支持10级碰撞检测和传感器安全检测；发生单一故障时不会丧失安全功能。
2.部署灵活：集成设计，轻便灵活，占地面积小；工作站部署新任务设置简单快捷，效果好。
3.简易编程：图形化编程、简单高效，无需精通编程语言即可轻松使用机器人（半小时可掌握编程方式，1小时可完成简易编辑）。
4.柔性生产：多种功能场景快速切换，可以采用人机协作、双机协作、多机协作等实现柔性化生产。
5.选配：激光雷达传感器（无接触、灵活设置检测距离，靠近黄色区域报警减速、进入红色区域立即停止）；光栅传感器（性能稳定，抗干扰能力强，感应灵敏度高，快速反应，使用寿命长）；安全围栏（物理防护，安全可靠）；输送线。
6.机器外壳采用碳钢/喷塑材料制成。

技术参数/Technical parameter:

型号/Model	YB-MD16	YB-MD20	YB-MD25	YB-MD30	YB-MD40
有效负载/Payload	16kg	20kg	25kg	30kg	40kg
工作半径/Working radius	1900mm	1600mm		1460mm	
码垛高度/Stacking height	2400mm	2100mm		1900mm	
最大托盘尺寸/Maximum pallet size	1300x1300mm	1200x1200mm		1200x1100mm	
码垛速度/Stacking speed	8-12 pcs/min	8-10 pcs/min		6-8 pcs/min	
重复定位精度/Repetitive positioning accuracy	±0.04mm				
通讯方式/Communication method	TCP/IP				
功率/Power	2.85 KW		3.9 KW		
电源/Power supply	1Ph.220V,50/60Hz				
净重/Net weight	≈300kg	≈320kg		≈350kg	
占地面积/Floor area	About L1505 xW1716mm				

1.Safety and stability: industrial grade force control sensors with high reliability and safety; support level 10 collision detection and sensor safety detection; safety functions will not be lost when occurs a single fault.
2.Flexible deployment: integrated design, lightweight and flexible, with a small foot print; the deployment of new tasks on workstations is simple, fast, and effective.
3.Easy programming: graphical programming, simple and efficient, no need to master programming languages to easily use robots (programming methods can be mastered in half an hour, simple editing can be completed in one hour).
4.Flexible production: multiple functional scenarios can be switched quickly, and flexible production can be achieved through human-machine collaboration, dual machines collaboration, and multi machines collaboration.
5.Optional: LiDAR (Lidar) sensor (contactless, set the detection distance flexibly, alarm and slow down near the yellow area, stop immediately upon when entering the red area); grating sensor (stable performance, strong anti-interference ability, high induction sensitivity, fast response, long service life); security fence (physical protection, safe and reliable); conveyor line.
6.Machine frame is made of carbon steel/spray plastic material.

YB–ZF5050/ZF6050

全自动折盖封箱机 Automatic Carton Folding and Sealing Machine



用途 Application :

本机广泛应用于食品、饮料、医药、化妆品、日化、汽车、线缆、电子等行业。

This machine is widely used in industries such as food, beverage, medicine, cosmetics, daily chemicals, automobiles, cables, electronics, etc.

性能特点 Performance feature:

1.工作流程：纸箱输送→折盖→顶部封箱(可选配底部同步封箱)→输出。
2.机器可用于不同规格的纸箱封箱。
3.气动封箱，快速、美观。
4.操作简单、经济耐用、故障率低。
5.可配套开箱机、装箱机、码垛机等连线使用。
6.机器外壳采用碳钢/喷塑材料制成。

1.Workflow: conveying box→folding top of box→top sealing (optional bottom sealing synchronously)→output.
2.Machine can be used for sealing cartons with different specifications.
3.Pneumatic sealing, fast and beautiful.
4.Easy to operate, economical and durable, with low failure rate.
5.It can be connected with carton erector, packing machine, palletizer, and other machines.
6.Machine frame is made of carbon steel/spray plastic material.

技术参数/Technical parameter:

型号/Model	YB-ZF5050	YB-ZF6050
纸箱尺寸/Carton size	L: 200-500mm, W: 150-500mm, H:150-500mm	L: 200-600mm, W: 150-500mm, H: 150-500mm
速度/Speed	25m/min	20m/min
胶带尺寸/Tape size	W: 48/60/72mm	
工作气压/Working air pressure	0.6-0.8Mpa	
功率/Power	1.0 KW	
电源/Power supply	1Ph. 220V, 50/60Hz	
净重/Net weight	≈180kg	≈200kg
外形尺寸/Overall dimension	About L2100 × W900 × H1600mm	About L2300 × W900× H1600mm

附属设备/Accessory Equipment



液体搅拌缸
Liquid Mixing Tank



转子泵 Rotor Pump



隔膜泵 Diaphragm Pump



真空上料机 Vacuum Feeder



粉剂搅拌缸 Powder Mixer



Z型提升机 Z Type Elevator



螺杆提升机 Auger Elevator



提盖机 Cap Elevator



组合称 Combination Weigher



架台 Platform

附属设备/Accessory Equipment



螺杆计量机 Auger Feeder




量杯计量机 Cup Volumetric Feeder



振动盘 Vibrate Bowl




空压机 Air Compressor

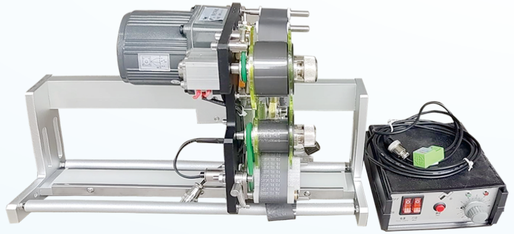

色带打码机 Ribbon Printer



夹瓶装置
Bottle Clamp Device

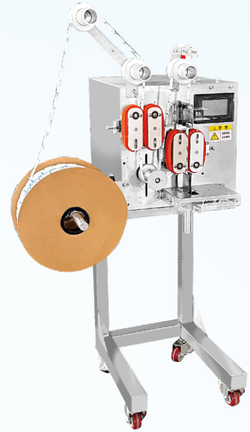


YB–T160 全自动脱氧剂投包机
Automatic Deoxidant Feeding Machine



分选抛光机
Sorting and Polishing Machine



尼龙转盘
Nylon Rotary Disk

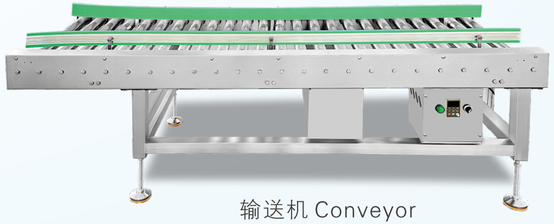

输送机 Conveyor